

SLG-6000

RGBW INTERIOR LED LINEAR COVE

The **SLG-6000** is an RGB/RGBW LED Linear Cove Wall Washer, offering the highest performance in color-changing wall washing. Compatible with DMX systems, suitable for architectural, retail hospitality and display applications

Project

Location

Quote/ Ref #



SPECIFICATIONS

INPUT VOLTAGE	110-277V AC
OPERATING FREQUENCY	50/ 60 Hz
DRIVER	Internal/ Built-In
POWER CONSUMPTION	11.7W (1 Ft.) 45.2W (4FT.)
DISTRIBUTION	120° x 120°
CRI	90+
COLOR TEMPERATURE	RGBW+27K/ RGBW+30K/ RGBW+35K/ RGBW+40K
DIMMING/ CONTROL	110~240V AC/ TRIAC
LENS	Clear Polycarbonate
CONNECTORS	Integral Male/ Female 5 pin
MAXIMUM RUN LENGTH	Linkable up to 48 Ft.
ENVIRONMENT	Indoor/ Dry/ Damp Location
STARTUP TEMPERATURE	14°F (-10°C) to 104°F (+40°C)
OPERATING TEMPERATURE	14°F (-10°C) to 104°F (+40°C)
STORAGE TEMPERATURE	40°F (-40°C) to 176°F (+80°C)
MOUNTING OPTIONS	Adjustable 80° + 80°

FEATURES

- Up to 580+ Lumens per Ft. HP (Full On)
- 50+ Lumens per Watt
- DMX/ DALI MultiVolt Input Options
- Small Profile Fixture
- Continuous Run Capability
- Proprietary Adjustable Mounting Bracket
- Ideal for Facade Wall Washing, Shopping Mall, Cove Lighting, and Signage




MODEL	LENGTH	COLOR TEMP	VOLTAGE
SLG	6012 12 In.	RGBW27K 2700K	UNV 120V~277V
	6048 48 In.	RGBW30K 3000K	
		RGBW35K 3500K	
		RGBW40K 4000K	


SLG-6000

RGBW INTERIOR LED LINEAR COVE

DIMENSIONS

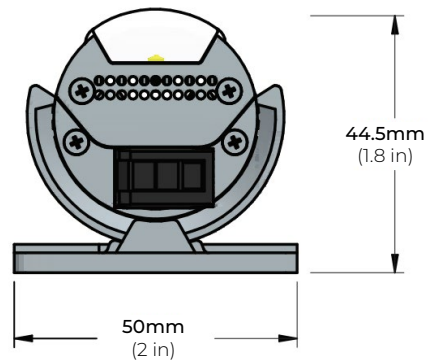

WIRING

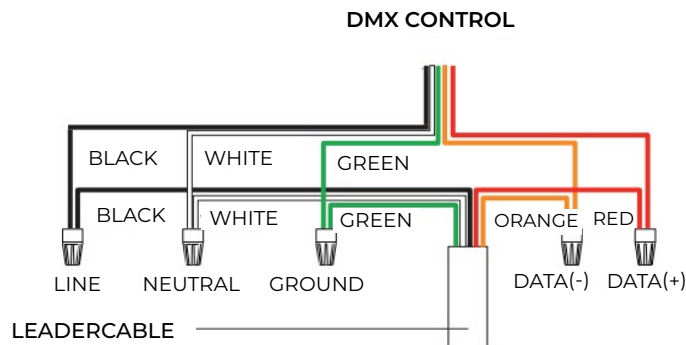

COMPATIBLE ACCESSORIES

SLG-LNK-12-DIM10

12" LINK CABLE



SLG-LNK-60-DIM10

60" LINK CABLE

SLG-HWC-120-DIM010

120" HARDWIRE CABLE

