

SLINQ-40

RECESSED TRIMLESS 360° ROUND NEON SERIES

Project _____
Location _____
Quote/ Ref # _____

Set your creativity free and unleash the endless possibilities with **SLINQ-40** Neon Series. Featuring a 360° light source and recessed trimless mounting options, this flexible neon ensures brilliant illumination from any angle, no matter how it's mounted. Discover what you can create.

SPECIFICATIONS

POWER CONSUMPTION	4.5W/ Ft. (SLQ40-SO) 5.5W/ Ft. (SLQ40-HO)
LUMEN OUTPUT	Up to 399 Lm/ Ft. (SLQ40-SO) Up to 642 Lm/ Ft. (SLQ40-HO)
CRI	90+
COLOR TEMPERATURE	23K/ 27K/ 30K/ 40K
MAXIMUM RUN LENGTH	16 Ft.
OPERATING VOLTAGE	24V
STORAGE TEMPERATURE	0°F (0°C) to 140°F (60°C)
OPERATING TEMPERATURE	-13°F (-25°C) to 131°F (55°C)
BEAM ANGLE	360°
IP RATING	IP65 Outdoor/ Wet Location
LUMEN MAINTENANCE	> 36,000 Hrs.



FEATURES

- 360° Light Source
- Recessed Trimless Options
- Universal Dimming
- IP65 Outdoor Rated
- Factory-Installed Power Feed
- Ideal for Decorative, Retail, Artistic Lighting
- UL Listed (US and Canada)

*This product is factory-cut only. Do not field modify.



MODEL	OUTPUT	COLOR TEMP	LENGTH	VOLTAGE	POWER FEED
SLQ40-FX	SO Standard Output (4.5W)	23K 2300K	1PF Per Foot	24V 24 Volts	EF72 72" End Feed
		27K 2700K			SF72 72" Side Feed
	HO High Output (5.5W)	30K 3000K			
		40K 4000K			
			*1 = Custom length per FT. (SO - Every 1.64") (HO - Every 1.97")		

SLINQ-40


RECESSED TRIMLESS 360° ROUND NEON SERIES

ACCESSORIES

SLQ40-RSM-WH

WHITE RECESSED MOUNT KIT


Ø80MM x 25mm (D x H)



SLQ40-TSM-WH

WHITE TRIMLESS MOUNT KIT

Ø78MM x 25mm (D x H)



CEILING MOUNTING KIT

Ø50MM x 47mm (D x H)

SLQ40-CMK-WH

WHITE CEILING MOUNT KIT

SLQ40-CMK-BK

BLACK CEILING MOUNT KIT

SLQ40-CMK-SI

SILVER CEILING MOUNT KIT



SLQ40-VMC

VISIBLE MOUNTING CLIP

25mm x 59mm x 43.2mm (L x W x H)



SLQ40-PC39

39" MOUNTING CHANNEL

1000mm x 59mm x 43.2mm (L x W x H)



SLQ40-DMB

DISCREET MOUNTING BRACKET


32.2mm x 14.3mm x 4.9mm (L x W x H)




SLINQ-40

RECESSED TRIMLESS 360° ROUND NEON SERIES

DIMENSIONS

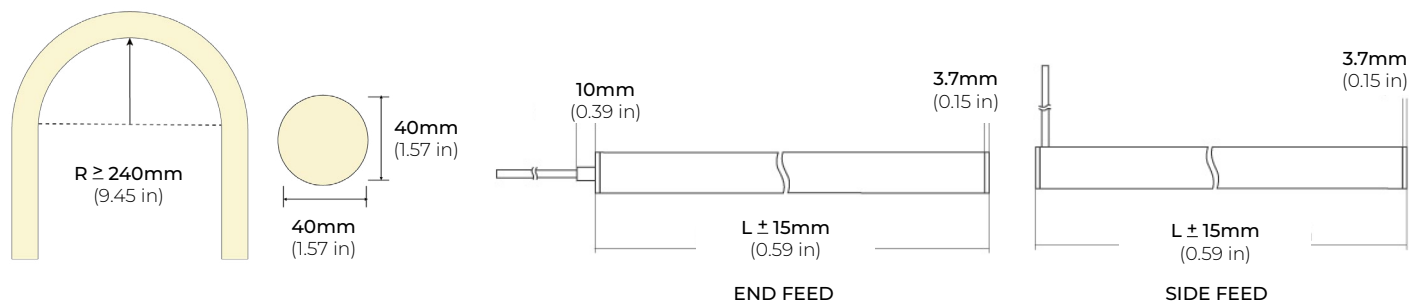

LIGHT DISTRIBUTION

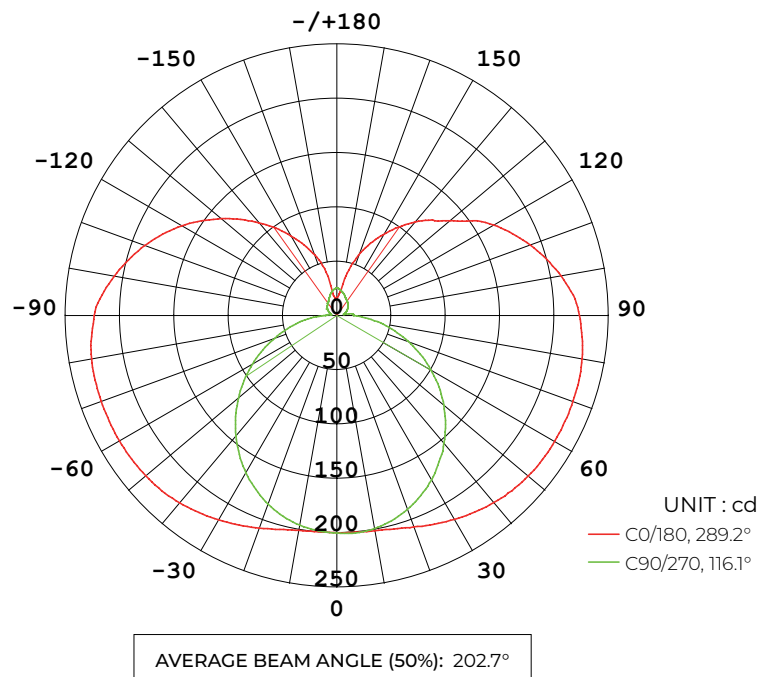


SLINQ-40

RECESSED TRIMLESS 360° ROUND NEON SERIES

COMPATIBLE TRANSFORMERS


PSDL SERIES TRIAC DIMMABLE

PSDL-30W-24V	CLASS 2	6.5" X 3.63" X 1.58"
PSDL-60W-24V	CLASS 2	7.4" X 3.63" X 1.58"
PSDL-96W-24V	CLASS 2	8.67" X 3.67 X 1.62"
PSDL-150W-24V		10.25" X 4.06" X 1.82"
PSDL-192W-24V	CLASS 2	11" X 4" X 1.82"
PSDL-200W-24V		10.25" X 4.06" X 1.82"
PSDL-288W-24V	CLASS 2	11.85" X 4.25" X 1.82"
PSDL-300W-24V		10.25" X 4.06" X 1.82"

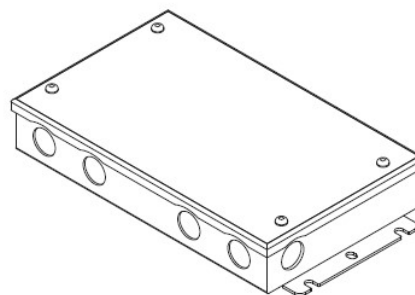


PSDH SERIES HIGH PERFORMANCE MAGNETIC LOW VOLTAGE (MLV)

PSDH-48W-24V	CLASS 2	11.25" X 3.38" X 3.38"
PSDH-96W-24V	CLASS 2	11.25" X 3.38" X 3.37"




PSRX SERIES 4-IN-1 DIMMING DRIVER W/ JUNCTION BOX

PSRX-30W-24V-UNV	CLASS 2	6.5" X 3.7" X 1.57"
PSRX-60W-24V-UNV	CLASS 2	7.4" X 3.72" X 1.57"
PSRX-96W-24V-UNV	CLASS 2	8.66" X 3.72" X 1.57"
PSRX-150W-24V-UNV		10.24" X 4.13" X 1.77"
PSRX-192W-24V-UNV	CLASS 2	11" X 4" X 1.82"
PSRX-200W-24V-UNV		10.24" X 4.13" X 1.77"
PSRX-288W-24V-UNV	CLASS 2	11.85" X 4.25" X 1.82"
PSRX-300W-24V-UNV		10.94" X 4.33" X 1.77"

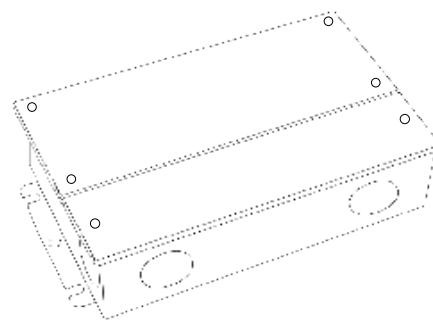

LUTRON 1% 3-WIRE DIMMING

L3DA4U1UKL-CV240	CLASS 2	4.89" X 4" X 2.62"
------------------	---------	--------------------

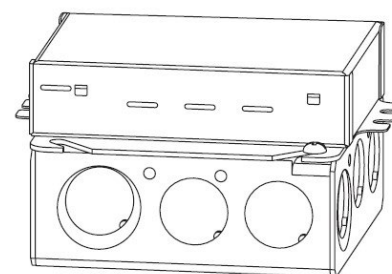


SLINQ-40

RECESSED TRIMLESS 360° ROUND NEON SERIES

COMPATIBLE TRANSFORMERS

LUTRON 1%
3-WIRE DIMMING

PSDE-96W-24V-ECO CLASS 2 10.5" X 3.0" X 2.0"



COMPATIBLE NON-DIMMING DRIVERS

PSHK SERIES
NON-DIMMING CONSTANT VOLTAGE WITH JUNCTION BOX

PSHK-30W-24V	CLASS 2	6.5" X 3.6" X 1.02"
PSHK-60W-24V	CLASS 2	7.4" X 3.62" X 1.02"
PSHK-96W-24V	CLASS 2	8.66" X 3.66" X 1.61"
PSHK-150W-24V		10.24" X 4.06" X 1.81"
PSHK-200W-24V		10.24" X 4.06" X 1.81"
PSHK-288W-24V	CLASS 2	11.85" X 4.25" X 1.82"
PSHK-300W-24V		10.24" X 4.25" X 1.81"

