

SLINQ MINI


MINI FLEXIBLE 360° ROUND NEON SERIES

Project _____
Location _____
Quote/ Ref # _____

Set your creativity free and unleash the endless possibilities. With versatile mounting options including flush mounts and free form designs, this flexible 360° light source gives illumination no matter how the fixture is mounted. Discover what you can create with the **Sling Mini** Neon Series.

SPECIFICATIONS

POWER CONSUMPTION	3W per Ft.
LUMEN OUTPUT	204 Lm/ Ft.
CRI	90+
COLOR TEMPERATURE	23K/ 27K/ 30K/ 43K
MAXIMUM RUN LENGTH	16.4 Ft. (24V) 32.8 Ft. (48V)
OPERATING VOLTAGE	24V/ 48V
STORAGE TEMPERATURE	0°C (0°F) to 60°C (140°F)
OPERATING TEMPERATURE	-25°C (-13°F) to 55°C (131°F)
BEAM ANGLE	360°
IP RATING	IP65 Outdoor/ Wet Location
LUMEN MAINTENANCE	50,000 Hrs.

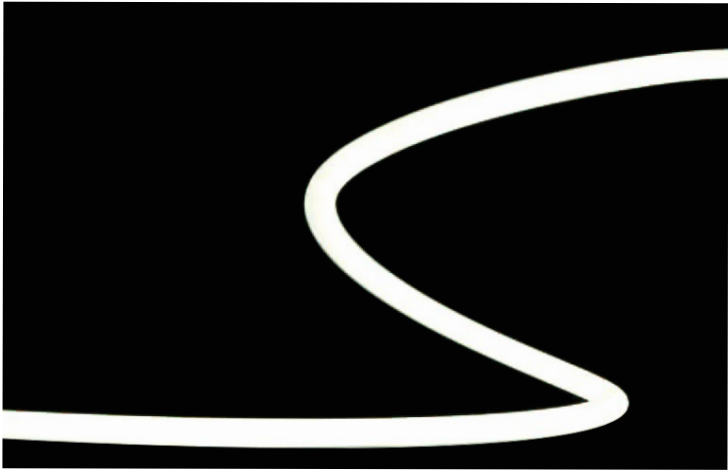

FEATURES

- 360° Light Source
- Multiple Mounting Options
- Universal Dimming
- Available in 24V and 48V DC
- IP65 Outdoor Rated
- Factory-Installed Power Feed
- Injection Moulded End-Caps
- Ideal for Decorative, Retail, Artistic Lighting

**This product is factory-cut only. Do not field modify.*



MODEL	LENGTH	COLOR TEMP	VOLTAGE	POWER FEED
SLQ-15	1PF Per Foot	23K 2300K 27K 2700K 30K 3000K 43K 4300K	24V 24 Volts 48V 48 Volts	EF72 72" End Feed
	*1 = Custom length per FT. (24V - Every 0.98") (48V - Every 1.97")			*MAX RUN: 24V - 16.4 Ft. 48V - 32.8 Ft.



SLINQ MINI

MINI FLEXIBLE 360° ROUND NEON SERIES

ACCESSORIES


SLQ15-MC MOUNTING CLIP

*SCREWS INCLUDED

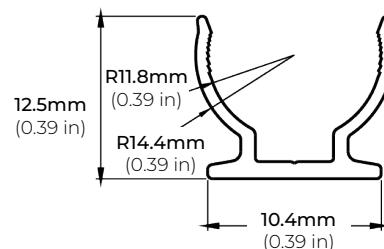

SLQ15-PC39 39" MOUNTING CHANNEL


*SCREWS INCLUDED

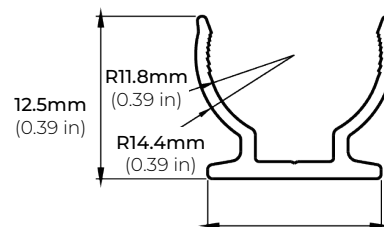

SLQ15-DMB DISCREET MOUNTING BRACKET

26mm x 9.4mm x 4mm (L x W x H)

*SCREWS INCLUDED

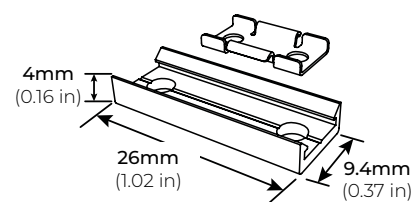


ROUND PLATE SUSPENSION KIT


SLQ15-RPS-BK SMALL ROUND PLATE (BLACK)
SLQ15-RPM-BK MEDIUM ROUND PLATE (BLACK)
SLQ15-RPL-BK LARGE ROUND PLATE (BLACK)

SLQ15-RPS-WH SMALL ROUND PLATE (WHITE)
SLQ15-RPM-WH MEDIUM ROUND PLATE (WHITE)
SLQ15-RPL-WH LARGE ROUND PLATE (WHITE)

*SCREWS INCLUDED

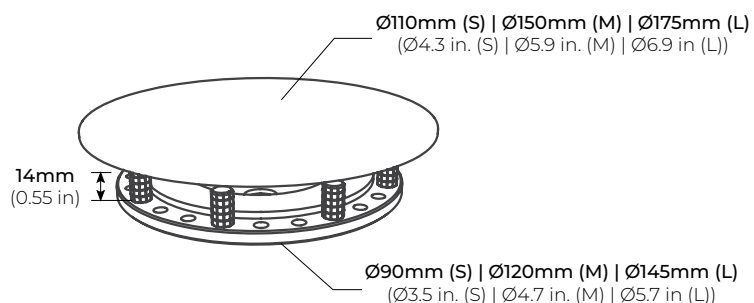

DIMENSIONS

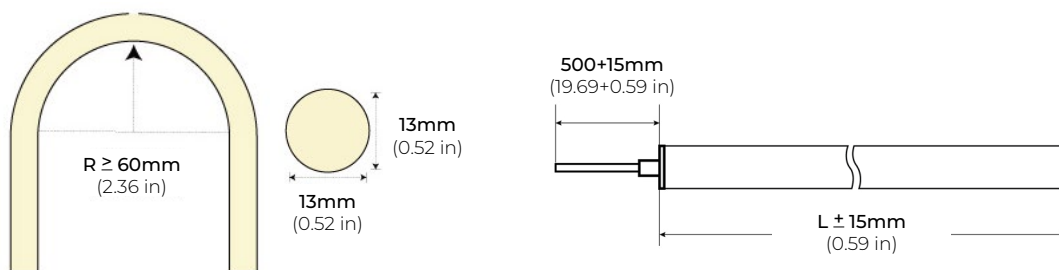


SLINQ MINI

MINI FLEXIBLE 360° ROUND NEON SERIES

COMPATIBLE 24V TRANSFORMERS


PSDL SERIES TRIAC DIMMABLE

PSDL-30W-24V	CLASS 2	6.5" X 3.63" X 1.58"
PSDL-60W-24V	CLASS 2	7.4" X 3.63" X 1.58"
PSDL-96W-24V	CLASS 2	8.67" X 3.67 X 1.62"
PSDL-150W-24V		10.25" X 4.06" X 1.82"
PSDL-192W-24V	CLASS 2	11" X 4" X 1.82"
PSDL-200W-24V		10.25" X 4.06" X 1.82"
PSDL-288W-24V	CLASS 2	11.85" X 4.25" X 1.82"
PSDL-300W-24V		10.25" X 4.06" X 1.82"

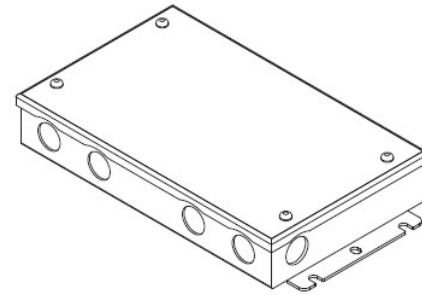


PSDH SERIES HIGH PERFORMANCE MAGNETIC LOW VOLTAGE (MLV)

PSDH-48W-24V	CLASS 2	11.25" X 3.38" X 3.38"
PSDH-96W-24V	CLASS 2	11.25" X 3.38" X 3.37"

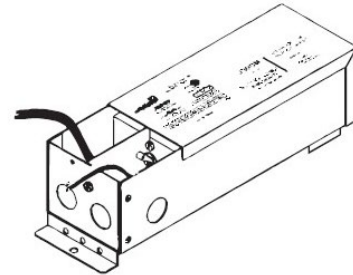

PSRX SERIES 4-IN-1 DIMMING DRIVER W/ JUNCTION BOX

PSRX-30W-24V	CLASS 2	6.5" X 3.72" X 1.57"
PSRX-60W-24V	CLASS 2	7.4" X 3.72" X 1.57"
PSRX-96W-24V	CLASS 2	8.66" X 3.72" X 1.57"
PSRX-150W-24V		10.24" X 4.13" X 1.77"
PSRX-192W-24V	CLASS 2	11" X 4" X 1.82"
PSRX-200W-24V		10.24" X 4.13" X 1.77"
PSRX-288W-24V	CLASS 2	11.85" X 4.25" X 1.82"
PSRX-300W-24V		10.94" X 4.33" X 1.77"

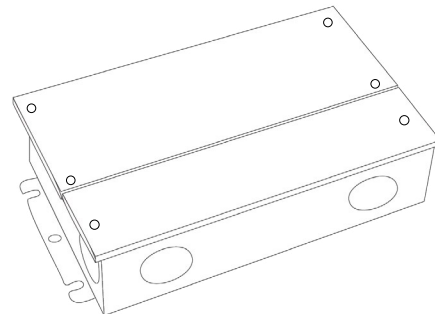


SLINQ MINI

MINI FLEXIBLE 360° ROUND NEON SERIES

COMPATIBLE 24V TRANSFORMERS

LUTRON 1%
3-WIRE DIMMING

L3DA4U1UKL-CV240 CLASS 2 4.89" X 4" X 2.62"

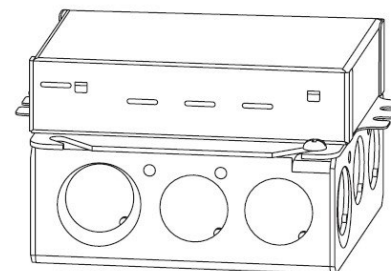


PSDE-96W-24V-ECO CLASS 2 10.5" X 3.0" X 2.0"



COMPATIBLE 24V NON-DIMMING DRIVERS

PSHK SERIES
NON-DIMMING CONSTANT VOLTAGE WITH JUNCTION BOX

PSHK-30W-24V	CLASS 2	6.5" X 3.6" X 1.02"
PSHK-60W-24V	CLASS 2	7.4" X 3.62" X 1.02"
PSHK-96W-24V	CLASS 2	8.66" X 3.66" X 1.61"
PSHK-150W-24V		10.24" X 4.06" X 1.81"
PSHK-200W-24V		10.24" X 4.06" X 1.81"
PSHK-288W-24V	CLASS 2	11.85" X 4.25" X 1.82"
PSHK-300W-24V		10.24" X 4.25" X 1.81"

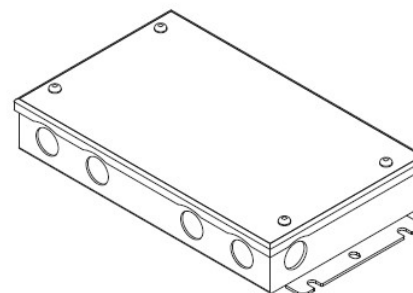

COMPATIBLE 48V TRANSFORMERS

PSRX SERIES
4-IN-1 DIMMING DRIVER W/ JUNCTION BOX

PSRX-200W-48V-UNV	10.24" X 4.13" X 1.77"
PSRX-300W-48V-UNV	10.24" X 4.13" X 1.77"

