

LNHV60

120V NEONFLEX

Project _____

Location _____

Quote/ Ref # _____

LNHV60 is a 120V, high performance, flexible LED fixture, designed as a neon replacement without the need for an external power supply. Suitable for indoor and outdoor applications, the LNHV60 easily bends **vertically** around contours and tight curves without being damaged.

SPECIFICATIONS

POWER CONSUMPTION	4.3W/ Ft.
LUMEN OUTPUT	224 Lm/ Ft. (30K)
CRI	90+
COLOR TEMPERATURE	27K/ 30K/ 35K/ 40K
DIMMING	ELV/ TRIAC
MAXIMUM RUN LENGTH	164Ft.
CUT INTERVALS	Every 3 in.
OPERATING VOLTAGE	120V
STORAGE TEMPERATURE	-40°F (-40°C) ~ 176°F (80°C)
OPERATING TEMPERATURE	-40°F (-40°C) ~ 104°F (40°C)
BEAM ANGLE	120°
BENDING DIAMETER	3.94"
IP RATING	IP65 Outdoor/ Wet Location
CERTIFICATIONS	ETL, RoHS
LUMEN MAINTENANCE	50,000 Hrs.



FEATURES

- 120° Light Source
- 120V AC
- ELV/ TRIAC Dimming
- UV Resistant
- ETL (US and Canada)

* This product is factory-cut only. Do not field modify.




MODEL	COLOR TEMP	VOLTAGE	LENGTH	POWER FEED	POWER FEED LENGTH
LNHV60-TB	27K 2700K	120V 120 Volts	Per Foot Per Foot	IP65EF End Feed	HW36 36 Inch Power Feed
	30K 3000K				HW120 120 Inch Power Feed
	35K 3500K				HWXX Custom Length Power Feed
	40K 4000K				


LNHV60

120V NEONFLEX

DIMENSIONS

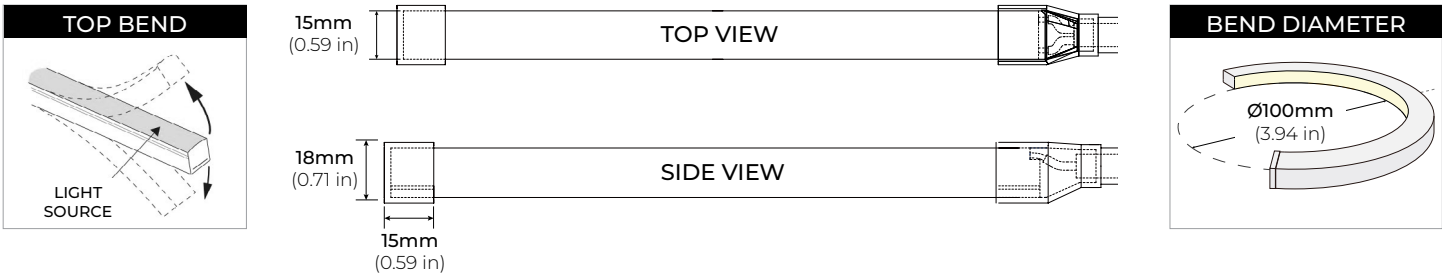

LIGHT DISTRIBUTION

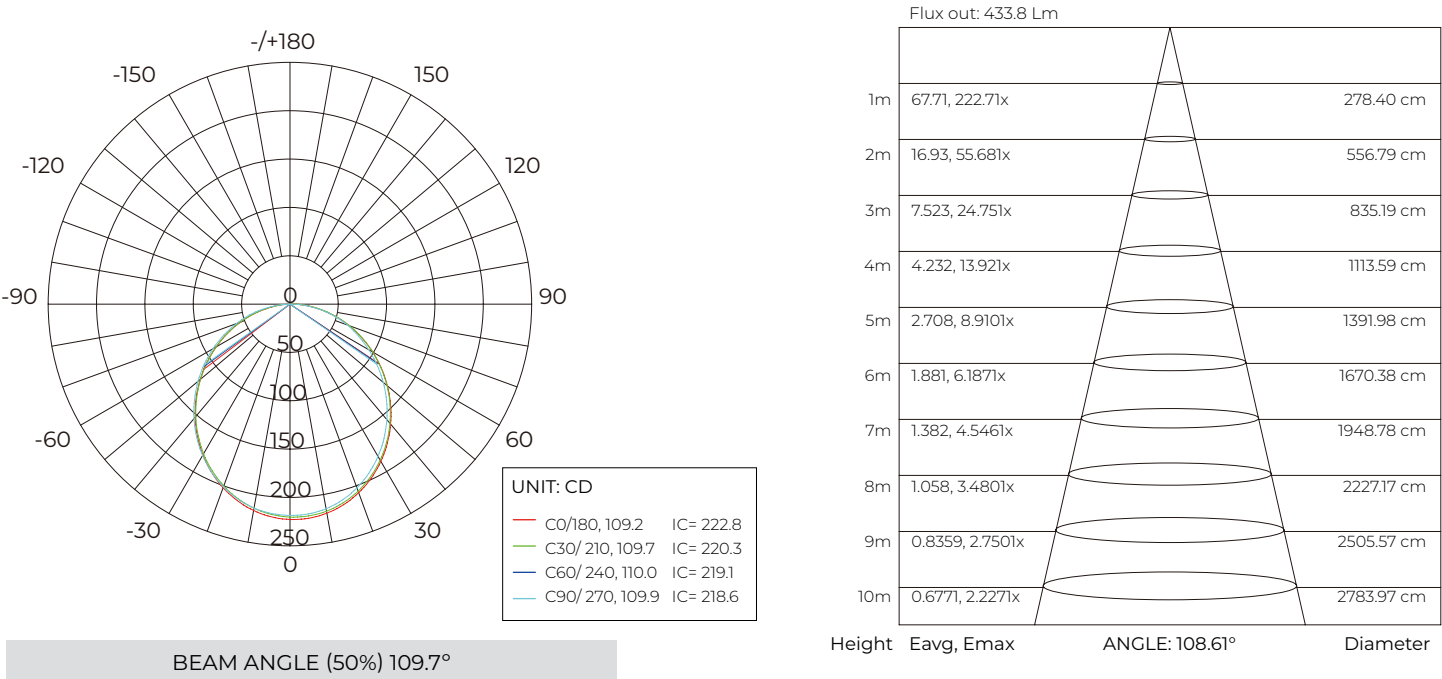

LNHV60


120V NEONFLEX

CORE
ARCHITECTURAL
LIGHTING


UPDATED: 08.10.26

ACCESSORIES


LNHV60-MB
MOUNTING BRACKET
25 X 17 X 18.5mm



LNHV60-AC96
96" ALUMINUM PROFILE

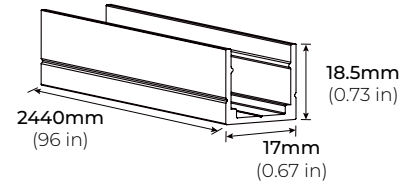

LNHV60-AFX
FLEXIBLE ALUMINUM PROFILE

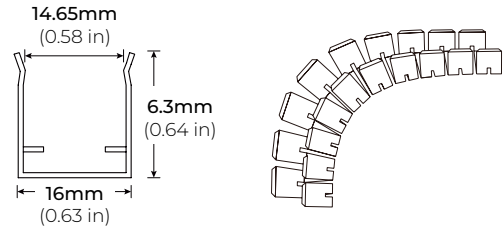

IP65 POWER FEED

IP65EF
END FEED

