

LSM-50CB RGBW

5.2W INDOOR COLOR-CHANGING + WHITE COB LED STRIP

UPDATED: 08.18.26

Project _____

Location _____

Quote/ Ref # _____

Delivering a solid stream of linear light, the **LSM-50CB RGBW** features the latest in COB technology (Chip On-Board) and provides the perfect lighting solution for spaces that require dynamic full color and white LED illumination.



SPECIFICATIONS

INPUT VOLTAGE	24V DC
POWER CONSUMPTION	5.2W/Ft.
LUMEN OUTPUT	292 Lm/Ft.
DIMMING	Through RGBW Controller
MAXIMUM RUN LENGTH	16.4 Ft.
CUTTABLE	Every 3.28 in (83.3mm)
OPERATING TEMPERATURE	-4°F (-20°C) to 176°F (80°C)
BEAM ANGLE	120°
IP RATING	IP20 (Indoor)
CERTIFICATIONS	UL Listed
LUMEN MAINTENANCE	50,000 Hrs.

LUMENS

COLOR	LM/ FT
Red	33
Green	128
Blue	24
White	100
RGBW	229

*Approved for closet / storage space installation per NEC 410.16(A)(3) and 410.16(C)(5)




MODEL	COLOR TEMP	LENGTH	VOLTAGE	PROFILE
LSM50CB	RGBW27K RGB+2700K	16 16 Ft.	24V 24V DC	See Page 3 for compatible profiles.
	RGBW30K RGB+3000K	100 100 Ft.		
	RGBW40K RGB+4000K	1XX per Ft.		
	RGBW50K RGB+5000K			
		*1 = Custom length per FT. (Cuttable every 3.28")		* Custom color finishes require powder coating. Allow 7 days leads time.

LSM-50CB RGBW

5.2W INDOOR COLOR-CHANGING + WHITE COB LED STRIP

DIMENSIONS

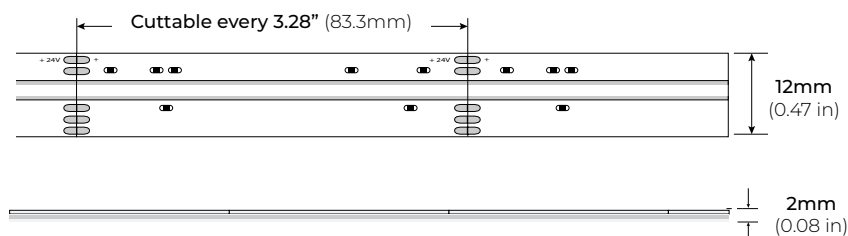


COMPATIBLE ALUMINUM PROFILES

SURFACE PROFILES


ALU-SF

LENGTHS 39" | 78" | 84" | 98"
LENS Clear, Frosted
FINISH Black | Silver




ALU-DS100

LENGTHS 39" | 78" | 84"
LENS Clear, Frosted
FINISH Silver




ALP-70

LENGTHS 49" | 84" | 98"
LENS Frosted
FINISH Black | Silver




ALP-75C (CORNER)

LENGTHS 49" | 84" | 98"
LENS Frosted
FINISH Black | Silver




ALP-80

LENGTHS 49" | 98"
LENS Frosted
FINISH Silver



ALP-102

LENGTHS 49" | 98"
LENS Frosted, Black, Asymmetric, Double Asymmetric
FINISH Black | Silver | White




* For more compatible profiles, visit corelightingusa.com

RECESSED PROFILES


ALP-20R

LENGTHS 49" | 98"
LENS Frosted
FINISH White | Black | Silver

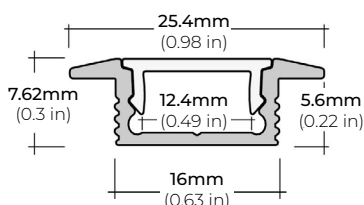

ALP-70R

LENGTHS 49" | 98"
LENS Frosted
FINISH Black | Silver



* For more compatible profiles, visit corelightingusa.com

LSM-50CB RGBW

5.2W INDOOR COLOR-CHANGING + WHITE COB LED STRIP


DMX CONTROLLERS

All DMX Controllers require a DMX Decoder and Non-Dimming Driver.
Please refer for page 4 and 6 for compatible options.

RGB CT600

MULTI-FUNCTION RGBW WALL CONTROLLER


INPUT VOLTAGE	5V DC, 1A
OUTPUT SIGNAL	RF 2.4GHZ + DMX512
CONTROL	4 ZONES
COLOR OPTIONS	Black/ White
WORKING TEMP	-20°C ~ 40°C
DIMENSIONS	LxWxH (5.19"x7.08"x1.38")



RGB-SCW4

WiFi DMX WALL CONTROLLER


INPUT VOLTAGE	5 - 10V DC, 06A
OUTPUT SIGNAL	DMX512 (x2)
PROGRAMMABILITY	PC/ MAC
COLOR OPTIONS	Black/ White
CONNECTIONS	USB/ 8dry contact ports/ Open drain output (for relay)
MEMORY	Built-In Flash
WORKING TEMP	-10°C ~ 45°C
DIMENSIONS	LxWxH (5.75"x4.17"x0.43")



RGB-SDE3

WiFi DMX WALL CONTROLLER

INPUT VOLTAGE	6V DC, 0.6A
OUTPUT SIGNAL	DMX512 (x2)
PROGRAMMABILITY	PC/ MAC/ Tablet/ Smartphone
COLOR OPTIONS	Black/ White
CONNECTIONS	USB/ Ethernet/ RS232/ CLock/ 8dry contact ports/ 5V output relay
MEMORY	MicroSD Card
WORKING TEMP	-20°C ~ 40°C
DIMENSIONS	LxWxH (5.75"x4.17"x0.43")



LSM-50CB RGBW

5.2W INDOOR COLOR-CHANGING + WHITE COB LED STRIP


DMX DECODERS

*All DMX Decoders require a DMX Controller and Non-Dimming Driver.
Please refer for page 3 and 6 for compatible options.*

RGB-DMX-4C-RJ45

4-CHANNEL DMX DECODER


INPUT VOLTAGE	12V-24V DC
OUTPUT CURRENT	8A X 4CH
OUTPUT WATTAGE	4 x (96W ~ 288W)
OUTPUT CHANNELS	4
DIMENSIONS	LxWxH (6.5"x2.38"x1.27")

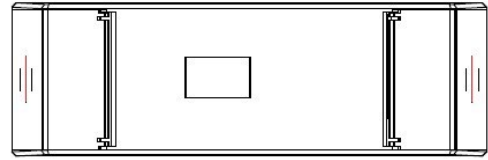

RGB-DMX-5C-XLR

5-CHANNEL DMX DECODER

INPUT VOLTAGE	12V-24V DC
OUTPUT CURRENT	8A X 5CH
OUTPUT WATTAGE	5 x (96W ~ 192W)
OUTPUT CHANNELS	5
DIMENSIONS	LxWxH (6.45"x2.87"x1.5")

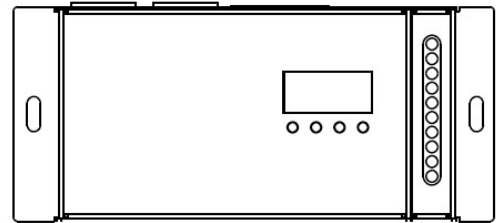

LSM-50CB RGBW

5.2W INDOOR COLOR-CHANGING + WHITE COB LED STRIP

NON-DMX CONTROLLERS

RGB-CT550

RGBW WIRELESS RECEIVER / CONTROLLER SYSTEM

INPUT VOLTAGE	DC5V ~ DC24V
POWER CAPACITY	100W (5V) 240W (12V) 480W (24V)
OUTPUT CURRENT	5A per Channel (20A Total)
WORKING TEMP	-30°C~55°C (-22°F~131°F)
DIMENSIONS	LxWxH (6.89"x1.73"x1.18")


** Paired with RGB-CT550-RX (Sold Separately)*

RGB-CT550-RX

RGBW WIRELESS RECEIVER / CONTROLLER SYSTEM (REMOTE)

REMOTE DISTANCE	100 Ft. (Line of Sight)
FREQUENCY	2.4 GHz
DIMENSIONS	LxWxH (6.38"x1.65"x0.59")
WEIGHT	0.44lbs.

** Paired with RGB-CT550 (Sold Separately)*




** RGB-CT550-RX
(Sold Separately)*

RGB-CT700

MASTER RGBW WIFI CONTROLLER

INPUT VOLTAGE	12-24V DC
OUTPUT TYPE	Constant Voltage
POWER CAPACITY	288W (12V) 384W (24V)
OUTPUT CURRENT	5A per Channel (20A Total)
WORKING TEMP	-4°F (-20°C) ~ 122°F (50°C)
DIMENSIONS	LxWxH (7 x1.8 x 0.8")

** Paired with RGB-CT705ZR (Sold Separately)*

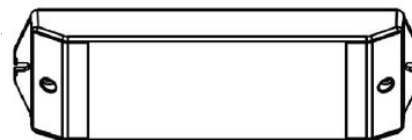

RGB-CT705ZR

SLAVE RGBW WIFI CONTROLLER

INPUT VOLTAGE	12-24V DC
OUTPUT TYPE	Constant Voltage
POWER CAPACITY	288W (12V) 384W (24V)
OUTPUT CURRENT	5A per Channel (20A Total)
WORKING TEMP	-4°F (-20°C) ~ 122°F (50°C)
DIMENSIONS	LxWxH (7 x0.63 x 0.71")

** Paired with RGB-CT700 (Sold Separately)*



LSM-50CB RGBW

5.2W INDOOR COLOR-CHANGING + WHITE COB LED STRIP

NON-DMX CONTROLLERS (CONTINUED)

RGB-CT840

BLUETOOTH TOUCH PANEL WALL CONTROLLER

INPUT VOLTAGE	12-24V DC
ZONES	4
CONTROL MODE	RGB RGBW
WIRELESS PROTOCOL	Bluetooth 5.0 SIG Mesh
WORKING TEMP	-20°C ~ 55°C
DIMENSIONS	LxWxH (4.7"x3"x1.2")

** Paired with RGB-CT800-RC (Sold Separately)*



RGB-CT800-RC

BLUETOOTH CONSTANT VOLTAGE LED RECEIVER

INPUT VOLTAGE	12V 24V
OUTPUT CURRENT	4Ax5CH / 5Ax4CH (20A Max)
POWER CAPACITY	240W (12V) 480W (24V)
PROGRAMMABILITY	iOS and Android
WORKING TEMP	-20°C ~ 55°C
DIMENSIONS	LxWxH (6.9 x1.7 x 1.2")

** Paired with RGB-CT840 (Sold Separately)*



NON-DIMMING DRIVERS

PSHK SERIES

NON-DIMMING CONSTANT VOLTAGE WITH JUNCTION BOX

PSHK-30W-24V	CLASS 2	6.5" X 3.6" X 1.02"
PSHK-60W-24V	CLASS 2	7.4" X 3.62" X 1.02"
PSHK-96W-24V	CLASS 2	8.66" X 3.66" X 1.61"
PSHK-150W-24V		10.24" X 4.06" X 1.81"
PSHK-200W-24V		10.24" X 4.06" X 1.81"
PSHK-288W-24V	CLASS 2	11.85" X 4.25" X 1.82"
PSHK-300W-24V		10.24" X 4.25" X 1.81"

