

LSHV-40CB

4W 120V PLUGIN COB LED TAPE LIGHT

LSHV-40CB is a high-performance, flexible 120V LED fixture featuring advanced COB (Chip-On-Board) technology to produce a smooth, continuous line of light in a sleek, low-profile design. Built as a 120V neon replacement, it runs without an external power supply. Suitable for indoor and outdoor use, the LSHV-40CB bends easily around contours and tight curves without damage.

SPECIFICATIONS

POWER CONSUMPTION	4W/ Ft.
LUMEN OUTPUT	260Lm/ Ft. (30K)
CRI	90+
COLOR TEMPERATURE	27K/ 30K/ 40K
DIMMING	ELV/ TRIAC
MAXIMUM RUN LENGTH	164 Ft.
CUT INTERVALS	Every 6 in.
OPERATING VOLTAGE	120V
STORAGE TEMPERATURE	-40°F (-40°C) ~ 176°F (80°C)
OPERATING TEMPERATURE	-40°F (-40°C) ~ 122°F (50°C)
BEAM ANGLE	120°
BENDING DIAMETER	3.9" (99.1mm)
IP RATING	IP65 Outdoor/ Wet Location
CERTIFICATIONS	ETL, RoHS
LUMEN MAINTENANCE	50,000 Hrs.



FEATURES

- 120° Light Source
- 120V AC, No power supply required
- Continuous Run up to 164 Ft.
- ELV/ TRIAC Dimming
- IP65
- ETL (US and Canada)

LUMENS

CCT	LM/ FT	LM/W
2700K	252	63
3000K	260	65
4000K	280	70

*This product is factory-cut only. Do not field modify.




MODEL	COLOR TEMP	LED LENGTH	VOLTAGE	POWER FEED	IP RATING
LSHV40CB	27K 2700K	XX per Ft.	120 120 Volts	HWC36 36" Hardwire Power Feed Cable	IP65 Outdoor/ Wet
	30K 3000K			HWC72 72" Hardwire Power Feed Cable	
	40K 4000K			HWC120 120" Hardwire Power Feed Cable	
				HWC240 240" Hardwire Power Feed Cable	
				HWC-CUS Custom Length Wire	
		*1 = Custom length per FT. (cuttable every 6")			

LSHV-40CB

4W 120V PLUGIN COB LED TAPE LIGHT

DIMENSIONS


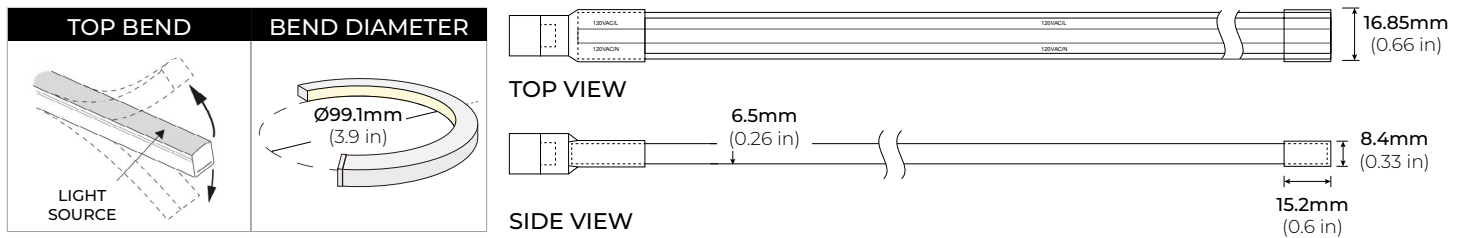


ACCESSORIES

LSHV40CB-CL

MOUNTING CLIP
20.1 X 15 X 11.4mm



* Set of 2 clips



LSHV40CB-PC48

48" PVC PROFILE
19.1 X 11.2mm



*Sold separately



LSHV40CB-AC48

48" ALUMINUM PROFILE
18.5 X 7.9mm

*Sold separately



MOUNTING CHANNEL & MOUNTING CLIP


LSG-CN48

48" ALUMINUM CHANNEL


LSG-CN-CL

MOUNTING CLIP

* Included with LSG-CN48



LSG-CN48



LSG-CN-CL

IP65 POWER FEED

IP65EF END FEED

