CORA DIRECT

DIRECT LINEAR LED WALL MOUNT


UPDATED: 10.27.26

Project _____

Location _____

Quote/ Ref # _____

CORA DIRECT is an architectural LED luminaire, offered in three lumen output options up to 704 lumens per foot, and frosted lens to eliminate any hotspots for a uniform beam of light. Manufactured from extruded aluminum with three standard powder-coated color options makes this low profile luminaire ideal for retail, office, school or commercial applications.

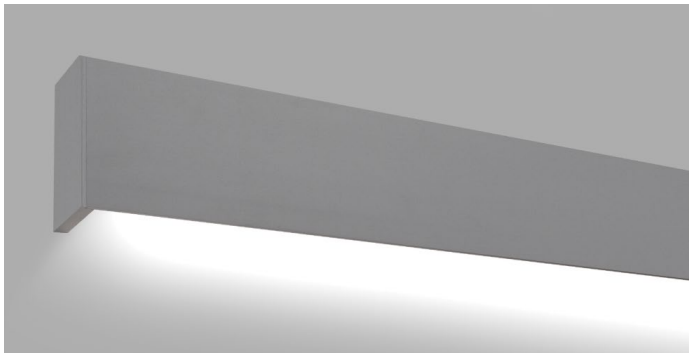

SPECIFICATIONS

INPUT VOLTAGE	24V
POWER CONSUMPTION	4W/ 5.5W/ 7W
LUMEN OUTPUT	704 Lm/ Ft. (30K)
BEAM ANGLE	180°
COLOR TEMPERATURE	27K/ 30K/ 35K/ 40K/ 50K/ 65K
MAX RUN	Linkable up to 32 ft.
CRI	90
DIMMING	ELV, 0-10V, DALI and DMX
HOUSING	Extruded Aluminum
AMBIENT TEMPERATURE	-4° (-20°C) to 122° (50°C)
ENVIRONMENT	Dry/ Damp Locations
CERTIFICATIONS	UL Listed
LUMEN MAINTENANCE	50,000 Hrs.
WARRANTY	5-Year Limited

FEATURES

- Wall Mounted Luminaire
- Quick and Easy Installation
- Multiple CCT options available
- UL Listed

LUMENS

CCT	WATTS (W/ FT.)	LM/FT (3000K)
L1	4W	440
L2	5.5W	529
L3	7W	704

INDOOR 90+ CRI DIMMABLE 50,000 HRS c UL us LISTED 5 YEAR WARRANTY


MODEL	LENGTH	DOWNLIGHT	COLOR TEMP	FINISH	DRIVER
CORA	**4** 48"	**DL1** 4W	**27K** 2700K	**SI** Silver	**ELV** ELV Dimming
	8 96"	**DL2** 5.5W	**30K** 3000K	**CC** Custom Color	**DIM10** 0-10 Dimming
	CU Custom Length	**DL3** 7W	**35K** 3500K		**DALI** DALI Dimming
			40K 4000K		**REM** Remote Driver
			50K 5000K		
			65K 6500K		

CORA DIRECT


DIRECT LINEAR LED WALL MOUNT

UPDATED: 10.27.26

DIMENSIONS

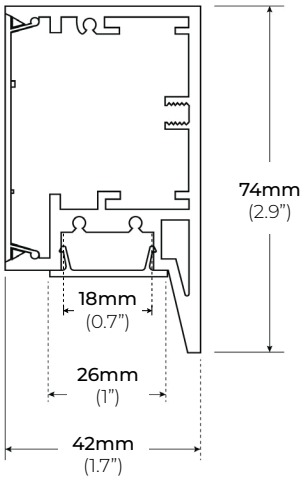

LIGHT DISTRIBUTION

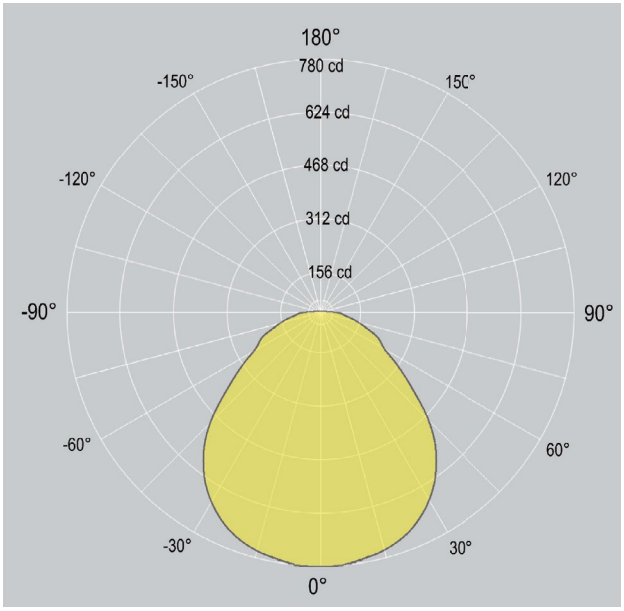

CORA DIRECT


UPDATED: 10.27.26

DIRECT LINEAR LED WALL MOUNT

ACCESSORIES

ALP900-SC
JOINING CONNECTOR KIT


*Sold Separately



ALP900-MB
MOUNTING BRACKETS
3.96" x 1.89" x 0.32"

* 2 brackets included with fixtures 75" and below
* 3 brackets included for 96" fixtures

*Included



ALP910-EC
END CAP

* Set of 2
(1) Right Side End Cap, (1) Left Side End Cap)

* Included

