

LUCA

SUSPENDED LINEAR LED SYSTEM

LUCA is a versatile and efficient suspended linear LED lighting system available in different lengths and color temperatures. It features a unique design that allows it to swivel 360° to direct its light source in any chosen direction. Seamless and continuous run installations deliver efficient illumination.

SPECIFICATIONS

TYPE	Suspended Mount
POWER CONSUMPTION	3W/ Ft. 5W/ Ft. 7W/ Ft.
INPUT VOLTAGE	24V
LUMEN OUTPUT	Up to 830 Lumens
CRI	90+
COLOR TEMPERATURE	27K / 30K / 35K / 40K
DIMMING	ELV, 0-10V and TRIAC
DRIVER	Remote
MAXIMUM RUN LENGTH	Linkable up to 16 Ft.
AVAILABLE LENGTHS	24 in./ 36 in./ 48 in./ 72 in.
LUMEN MAINTENANCE	50,000 Hrs.
CERTIFICATIONS	ETL Listed
WARRANTY	5 Years



FEATURES

- Slim Profile, Modular Design
- Tight, Smooth fixture rotation for directional light aiming
- 360° Rotate
- Extruded Anodized Aluminum
- Exceptional light distribution and efficacy

LUMENS

LIGHT OUTPUT	WATTS (W/FT.)	LM/ FT.
L2	3	307
L3	5	596
L4	7	830



*Approved for closet / storage space installation per NEC 410.16(A)(3) and 410.16(C)(5)




MODEL	LENGTH	OUTPUT	CCT	FINISH	LENS	SUSPENSION	POWER FEED	DRIVER	ACCESSORIES
LUCA	24 24 in.	L2 3W	27K 2700K	BA Brushed Aluminum	FR Frosted	CF5 5 Ft. Suspension Cable	<u>5" Canopy</u> RC5 Suspended End Power Feed	See pages 5-6 for compatible drivers	See page 4 for options
	36 36 in.	L3 5W	30K 3000K	BK Black			RC5-R Suspended Side Power Feed Right		
	48 48 in.	L4 7W	35K 3500K	WH White		CF10 10 Ft. Suspension Cable	<u>2" Canopy</u> RC2 Suspended End Power Feed		
	72 72 in.		40K 4000K				RC2-R Suspended Side Power Feed Right		

SUSPENDED LINEAR LED SYSTEM


DIMENSIONS

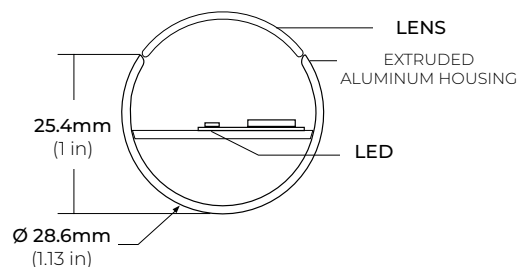


LUCA-24



LUCA-36



LUCA-48




LUCA-72

SUSPENDED LINEAR LED SYSTEM

5" CANOPY POWER FEED SUSPENSION KIT


RC5
SUSPENDED END POWER FEED KIT

* 60" AIRCRAFT CABLE INCLUDED

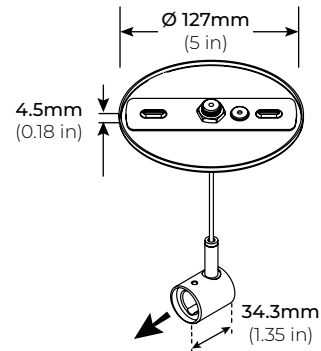

RC5-R
SUSPENDED SIDE POWER FEED (RIGHT) KIT


* 60" AIRCRAFT CABLE INCLUDED

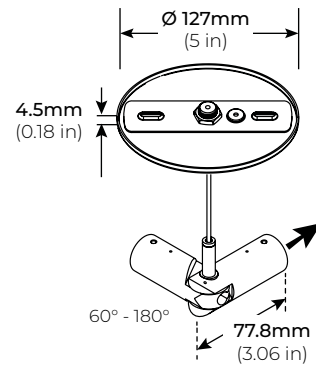

2" CANOPY POWER FEED SUSPENSION KIT


RC2
SUSPENDED END POWER FEED KIT

* 60" AIRCRAFT CABLE INCLUDED

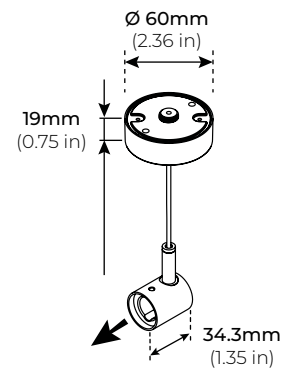

RC2-R
SUSPENDED SIDE POWER FEED (RIGHT) KIT

* 60" AIRCRAFT CABLE INCLUDED

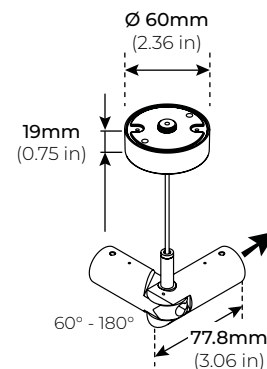


SUSPENDED LINEAR LED SYSTEM

COMPATIBLE ACCESSORIES


CSB SUSPENDED END SUPPORT

* 60" AIRCRAFT CABLE INCLUDED




DHB SUSPENDED DOUBLE-END CONNECTOR

* 60" AIRCRAFT CABLE INCLUDED




SAN SUSPENDED ANGLED CONNECTOR (NON-POWER)

* 60" AIRCRAFT CABLE INCLUDED



SAP SUSPENDED ANGLED CONNECTOR (POWER)

* 60" AIRCRAFT CABLE INCLUDED




SUSPENDED LINEAR LED SYSTEM

COMPATIBLE TRANSFORMERS

PSDL SERIES

TRIAC DIMMABLE


PSDL-30W-24V	CLASS 2	6.5" X 3.63" X 1.03"
PSDL-60W-24V	CLASS 2	7.4" X 3.63" X 1.03"
PSDL-96W-24V	CLASS 2	8.67" X 3.67" X 1.62"
PSDL-150W-24V		8.67" X 3.67" X 1.62"
PSDL-192W-24V	CLASS 2	10.25" X 4.06" X 1.82"
PSDL-200W-24V		10.25" X 4.06" X 1.82"
PSDL-288W-24V	CLASS 2	10.25" X 4.06" X 1.82"
PSDL-300W-24V		10.25" X 4.06" X 1.82"

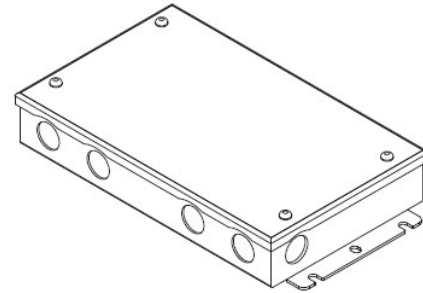

PSRX SERIES

4-IN-1 DIMMING DRIVER


PSRX-30W-24V	CLASS 2	6.5" X 3.72" X 1.57"
PSRX-60W-24V	CLASS 2	7.4" X 3.72" X 1.57"
PSRX-96W-24V	CLASS 2	8.66" X 3.72" X 1.57"
PSRX-150W-24V		10.24" X 4.13" X 1.77"
PSRX-192W-24V	CLASS 2	11" X 4" X 1.82"
PSRX-200W-24V		10.24" X 4.13" X 1.77"
PSRX-288W-24V	CLASS 2	11.85" X 4.25" X 1.82"
PSRX-300W-24V		10.94" X 4.33" X 1.77"

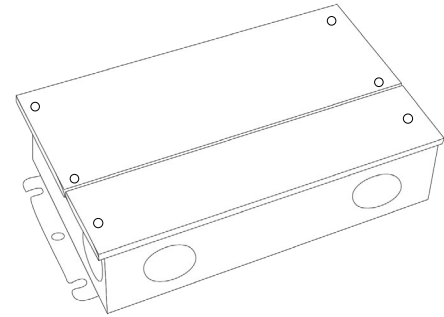

PSVT SERIES

0-10V DIMMING DRIVER


PSVT-60W-24V	CLASS 2	7.4" X 3.72" X 1.57"
PSVT-96W-24V	CLASS 2	8.66" X 3.72" X 1.57"
PSVT-200W-24V		10.24" X 4.13" X 1.77"
PSVT-288W-24V	CLASS 2	11.85" X 4.25" X 1.81"
PSVT-300W-24V		10.94" X 4.33" X 1.77"

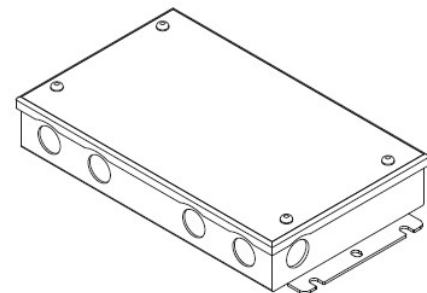

PSDE SERIES

0-10V DIMMING W/ JUNCTION BOX

PSDE-60W-24V-010-JB	CLASS 2	12.1" X 2.36" X 1.4"
PSDE-96W-24V-010-JB	CLASS 2	12.1" X 2.36" X 1.4"

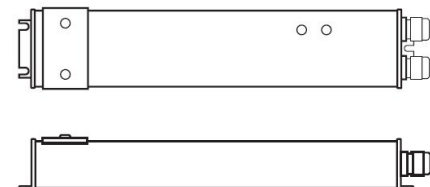


SUSPENDED LINEAR LED SYSTEM


COMPATIBLE TRANSFORMERS

LUTRON 1%
3-WIRE DIMMING

L3DA4U1UKL-CV240 CLASS 2 4.89" X 4" X 2.62"

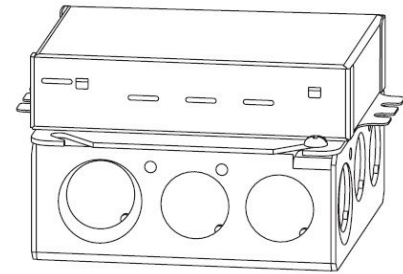

PSDE-96W-24V-ECO CLASS 2 10.5" X 3.0" X 2.0"



NON-DIMMING DRIVERS (COMPATABLE WITH ALL SYSTEMS)

PSHK SERIES
NON-DIMMING CONSTANT VOLTAGE WITH JUNCTION BOX

PSHK-30W-24V	CLASS 2	6.5" X 3.6" X 1.02"
PSHK-60W-24V	CLASS 2	7.4" X 3.62" X 1.02"
PSHK-96W-24V	CLASS 2	8.66" X 3.66" X 1.61"
PSHK-150W-24V		10.24" X 4.06" X 1.81"
PSHK-200W-24V		10.24" X 4.06" X 1.81"
PSHK-288W-24V	CLASS 2	11.85" X 4.25" X 1.82"
PSHK-300W-24V		10.24" X 4.25" X 1.81"

