



INSTALLATION GUIDE

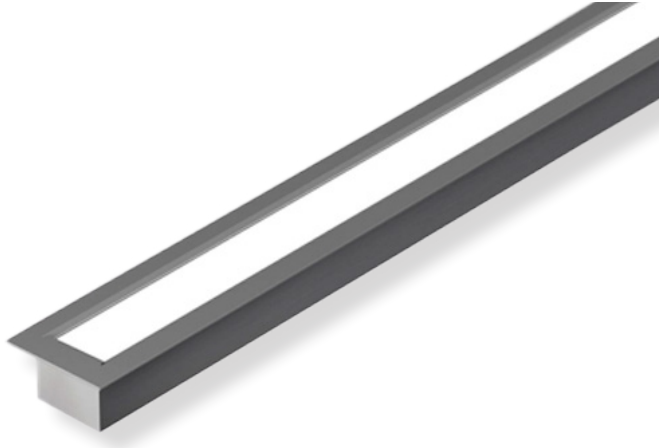

DIMENSIONS

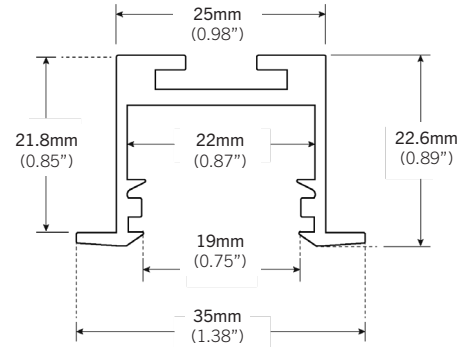

PRE-INSTALLATION

Recessed Mount

Disconnect power source prior to installation.

SAFETY

Read all instructions before installation.

These products may represent a possible shock or fire hazard if improperly installed.

Do not look directly into light.

This fixture is only suitable for indoor installation.



Product should be installed by a qualified electrician.



Product should be installed in accordance with these instructions and current electrical codes.

INSTALLATION

STEP 1 Measure, mark, and cutout drywall where channel will be mounted. (Figure 1)








STEP 2 Run main power wire through ceiling. (Figure 2)

STEP 3 Drill a hole in channel and drywall for main power wire. (Figure 3)

STEP 4 Screw end caps to channel. (Figure 4)
*If using multiple channels, screw end cap to only the first and last channel ends for a continuous run.

STEP 5 **Silicone Install:**
Apply silicone to drywall slot and install ALP-102R profile. (Figure 5A)

Butterfly Clip Install:
Slide Butterfly Clip (ALP102R-RB) onto profile and fix into place with provided screw. Install profile into drywall slot. (Figure 5B)
*Silicone is not necessary when using Butterfly Clip.

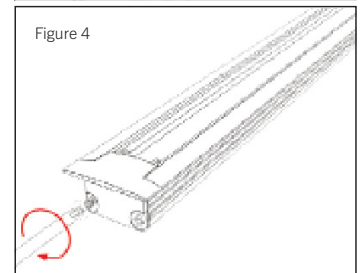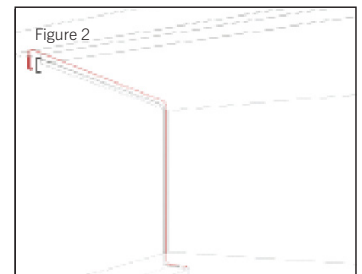



INSTALLATION (CONT.)

STEP 5

Peel the adhesive backing of the LED strip and install onto the channel. (Figure 6)

Make sure that the LED strip is laid evenly flat on the channel. This will avoid having any dark spots once lit up.

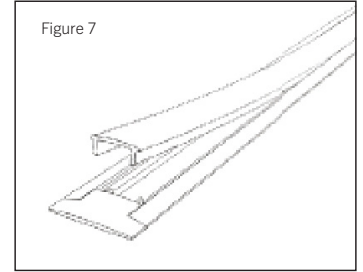

STEP 6

Push the diffuser cover in place. (Figure 7)