




INSTALLATION GUIDE

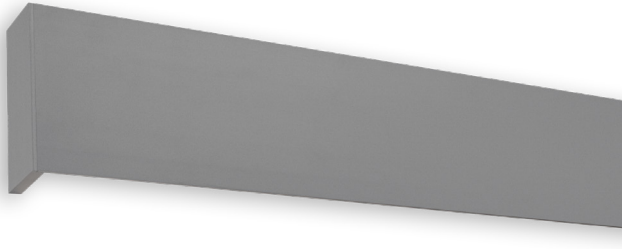

DIMENSIONS



CORA DIRECT

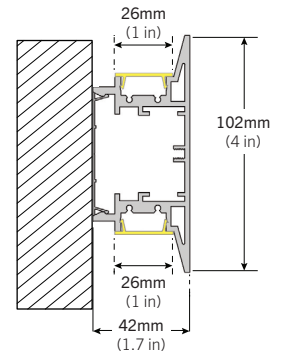

CORA DIRECT/ INDIRECT



PRE-INSTALLATION

Wall Mount

Power input is 24V. Confirm the source voltage is compatible.

Disconnect power source prior to installation.

SAFETY

Read all instructions before installation.

These products may present a possible shock, serious injury, or death if improperly installed.



Product should be installed by a qualified electrician.



Product should be installed in accordance with these instructions and current electrical codes.

INSTALLATION (SINGLE)

STEP 1

Mark your chosen wall surface with a pencil to map out the planned installation.

STEP 2

Using the appropriate hardware, install the mounting bracket. Secure with screws. (Figure 1)

* 2 Mounting Brackets for fixtures 75" and Below

* 3 Mounting Brackets included for 8 Ft. Fixtures

STEP 3

Install the profile body onto the mounting bracket. Secure with set screws. (Figure 2)

STEP 4

Wire appropriately. (Figure 3)

STEP 5

Turn on Fixture.

Figure 1

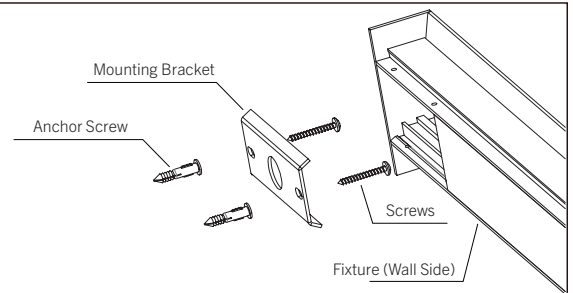


Figure 2


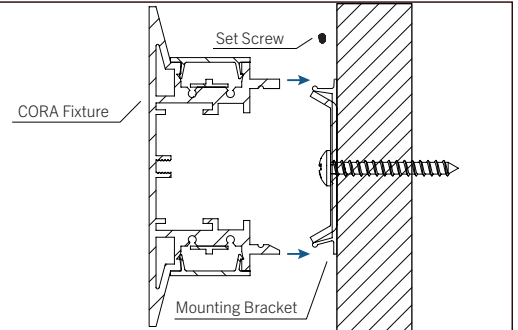


Figure 3



0-10V DIMMING (DIM10)

BLACK — Live
WHITE — Neutral
GREEN — Earth
RED — Dim (Live)
BLUE — Dim (Neutral)

ELV DIMMING (ELV)

BLACK — Live
WHITE — Neutral
GREEN — Earth

INSTALLATION (MULTIPLE)

STEP 1

Mark your chosen wall surface with a pencil to map out the planned installation.

STEP 2

Using the appropriate hardware, install the mounting bracket. Secure with screws. (Figure 1)

STEP 3

Slide a Joining Connector (ALP900-SC) to the continuing end of the fixture body. Loosely secure in place with set screws. (Figure 2)

STEP 4

Connect wires between fixtures using connectors and push the excess wires into the fixture bodies. (Figure 3)

STEP 5

Slide the connecting fixture body onto the opposite end of the joining connector and secure in place with set screws. (Figure 4)
*Tight enough for a secure fit, but not tight enough to damage the fixture housing.

STEP 6

Install the profile body onto the mounting bracket. Secure with set screws. (Figure 5)

STEP 7

Wire appropriately. (Figure 6)

STEP 8

Turn on Fixture.

Figure 1

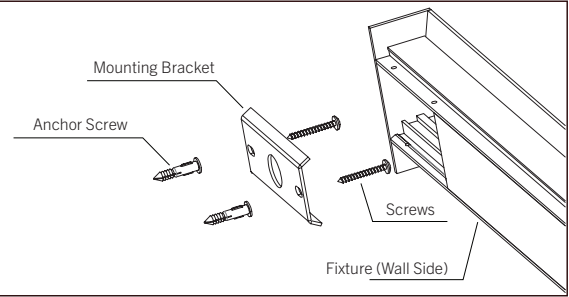


Figure 2

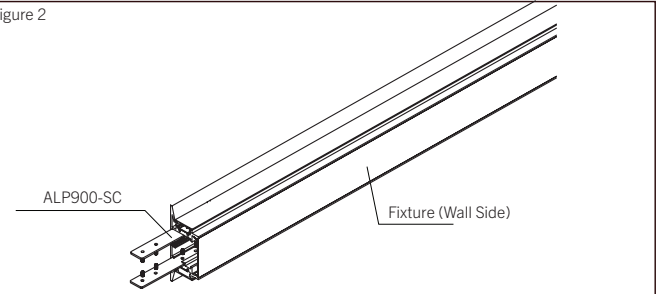


Figure 3




Figure 4

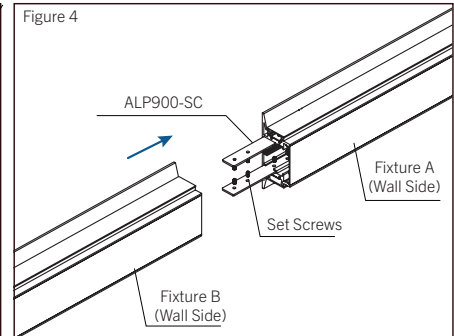


Figure 5


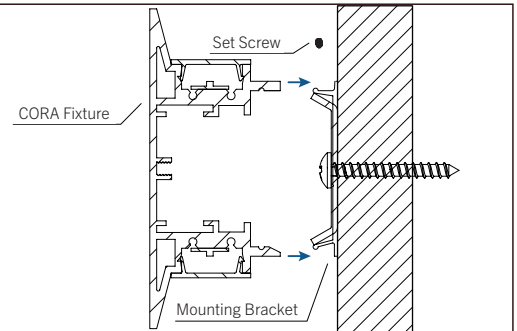


Figure 6



0-10V DIMMING (DIM10)

BLACK — Live
WHITE — Neutral
GREEN — Earth
RED — Dim (Live)
BLUE — Dim (Neutral)

ELV DIMMING (ELV)

BLACK — Live
WHITE — Neutral
GREEN — Earth