

LNT65-SPA

3.0W Sauna/Steam Rated Flexible LED Neon Series




The LNT65-SPA Series is a high performance flexible LED fixture designed for use in a sauna/steam environment. Designed to resist high temperatures with its adaptive constant current control built-in feature. It is a flexible strip light that can bend around contours or tight curves horizontally or vertically without being damaged.

FEATURES

- Sauna/steam rated for use in higher temperatures
- High color consistency and smooth illumination
- Multiple CCT options available
- Continuous run length up to 32 Ft. (10M)
- Bottom, Side and End Feed options

SPECIFICATIONS

INPUT VOLTAGE	24V DC Constant Voltage
POWER CONSUMPTION	3W per Ft.
LUMEN OUTPUT	150 Lumens per Ft.
BEAM ANGLE	160°
CRI	88+
DIMMING	MLV, ELV, 0-10 and TRIAC
MAXIMUM RUN LENGTH	32 Ft.
IP RATING	IP67
LUMEN MAINTENANCE	50,000 Hours
LED CHIP	NICHIA
OPERATING TEMPERATURE	-4°F ~194°F (-20°C ~ 90°C)
STORAGE TEMPERATURE	-40°F ~176°F (-40°C ~ 80°C)
HUMIDITY	0-95% Non Condensing UL
CERTIFICATIONS	Listed / UL-676 (IP67)
DIMENSIONS	Width x Depth: 0.63" x 0.67"

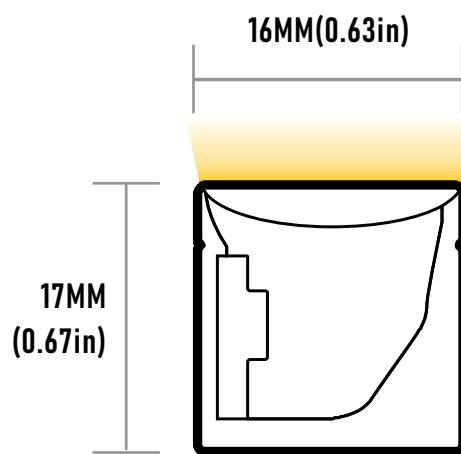

LNT65-SPA

3.0W Sauna/Steam Rated Flexible LED Neon Series



STANDARD ORDERING GUIDE


Model	Light Surface	Color Temp	Voltage	Length (CODE)	Power Feed	Power Feed Length		
LNT-65SPA	HB Horizontal Bend	24K 2400K	24V 24V DC	Please refer to pages 6-7 for exact lengths with corresponding ordering codes.	IP67BF Bottom Feed	HW3 3 Ft. Power Feed		
		27K 2700K			IP67SFL Side Feed Left	HW10 10 Ft. Power Feed		
	VB Vertical Bend	30K 3000K			IP67SFR Side Feed Right	HW15 15 Ft. Power Feed		
		35K 3500K			IP67EF End Feed	HW30 30 Ft. Power Feed		
		40K 4000K						HW50 50 Ft. Power Feed
		50K 5000K						
		RD Red						
		GN Green						
		BL Blue						
	AM Amber							
PK Pink								
YW Yellow								

LNT65-SPA

3.0W Sauna/Steam Rated Flexible LED Neon Series


POWER FEED

BF
Bottom Feed

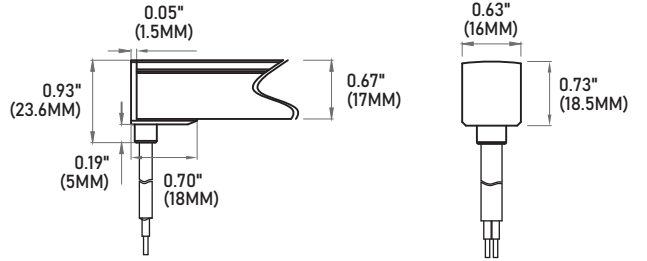


SFL
Side Feed Left

LEFT

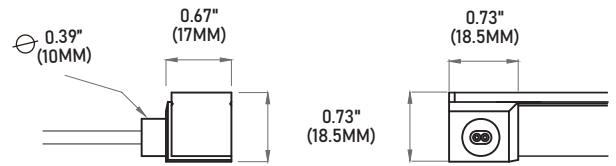


SFR
Side Feed Right


RIGHT

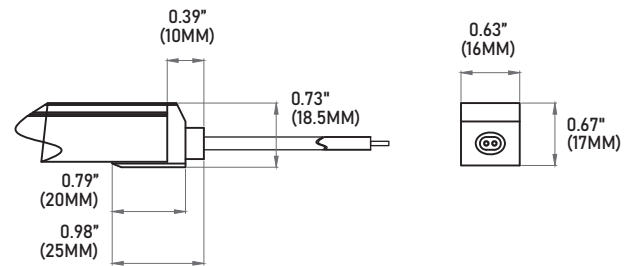

EF
End Feed

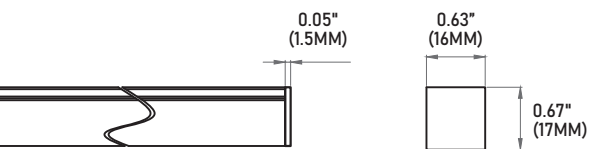

EC
End Cap



LNT65-SPA


3.0W Sauna/Steam Rated Flexible LED Neon Series

ACCESSORIES

SELF LOCKING ALUMINUM PROFILE


LNT65-AC2
2" Profile

LNT65-AC39
39" Profile

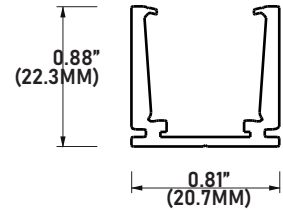



PLASTIC PROFILE

LNT65-PC39
39" Profile


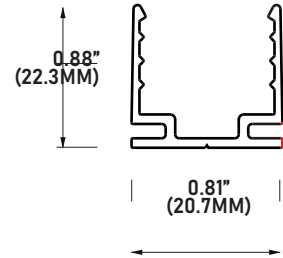


BEND RADIUS

LNT65-VB
(VERTICAL BEND)

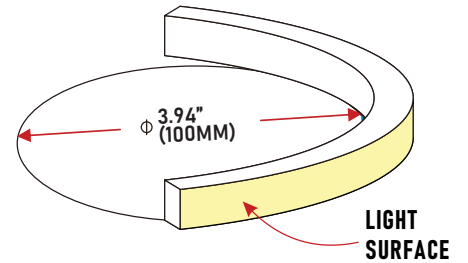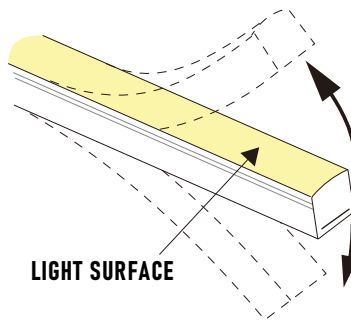

LNT65-HB
(HORIZONTAL BEND)

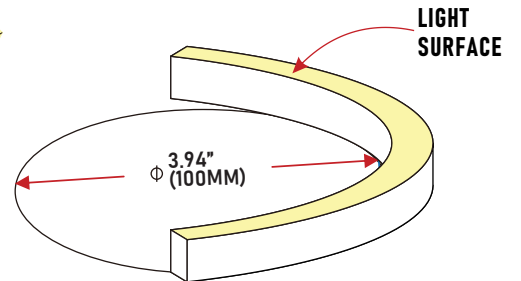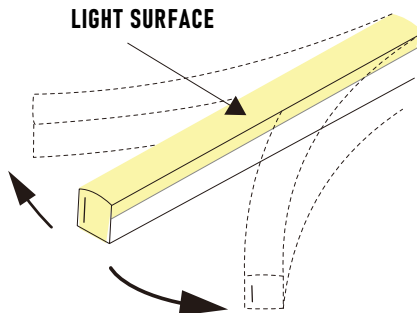

LNT65-SPA

3.0W Sauna/Steam Rated Flexible LED Neon Series



LNT65 Series is cuttable **every 2.19" (5.56 CM)**. Please refer to chart below to determine actual lengths once LED is cut versus actual lengths required or specified.

Total Length Calculation = order code length + end feed option length
 example: 66.92" total length = code 30 + IP67 side feed (65.67" + 1.25")

Optional lead wire lengths available: **3Ft., 10Ft., 16Ft., 32Ft., 50Ft.**

POWER FEED OPTION	IP67
END FEED	0.65"
BOTTOM FEED	0.65"
SIDE FEED	0.65"

CUTTING LENGTH INCREMENT TABLE

CODE	LENGTH IN CM	LENGTH IN INCHES	CODE	LENGTH IN CM	LENGTH IN INCHES
3	16.68	6.57	34	189.04	74.43
4	22.24	8.76	35	194.6	76.61
5	27.8	10.94	36	200.16	78.80
6	33.36	13.13	37	205.72	81.00
7	38.92	15.32	38	211.28	83.18
8	44.48	17.51	39	216.84	85.37
9	50.04	19.70	40	222.4	87.56
10	55.6	21.89	41	227.96	89.75
11	61.16	24.08	42	233.52	91.94
12	66.72	26.27	43	239.08	94.13
13	72.28	28.46	44	244.64	96.31
14	77.84	30.65	45	250.2	98.50
15	83.4	32.83	46	255.76	100.70
16	88.96	35.02	47	261.32	102.89
17	94.52	37.21	48	266.88	105.07
18	100.08	39.40	49	272.44	107.26
19	105.64	41.59	50	278	109.45
20	111.2	43.78	51	283.56	111.64
21	116.76	45.97	52	289.12	113.83
22	122.32	48.16	53	294.68	116.02
23	127.88	50.35	54	300.24	118.21
24	133.44	52.54	55	305.8	120.40
25	139	54.72	56	311.36	122.59
26	144.56	56.91	57	316.92	124.78
27	150.12	59.10	58	322.48	126.96
28	155.68	61.29	59	328.04	129.15
29	161.24	63.48	60	333.6	131.34
30	166.8	65.67	61	339.16	133.53
31	172.36	67.86	62	344.72	135.72
32	177.92	70.05	63	350.28	137.91
33	183.48	72.24	64	355.84	140.09
			65	361.4	142.28
			66	366.96	144.47

LNT65-SPA

3.0W Sauna/Steam Rated Flexible LED Neon Series



CUTTING LENGTH INCREMENT TABLE

CODE	LENGTH IN CM	LENGTH IN INCHES	CODE	LENGTH IN CM	LENGTH IN INCHES
67	372.52	146.66	107	594.92	234.22
68	378.08	148.85	108	600.48	236.41
69	383.64	151.04	109	606.04	238.59
70	388.95	153.23	110	611.12	240.78
71	394.76	155.42	111	617.16	242.98
72	400.32	157.61	112	622.72	245.17
73	405.88	159.80	113	628.28	247.35
74	411.44	161.98	114	633.84	249.54
75	416.68	164.17	115	638.91	251.73
76	422.56	166.36	116	644.96	253.92
77	428.12	168.55	117	650.52	256.12
78	433.68	170.74	118	656.08	258.31
79	439.24	172.93	119	661.64	260.50
80	444.47	175.13	120	666.72	262.68
81	450.36	177.31	121	672.76	264.88
82	455.92	179.49	122	678.32	267.07
83	461.48	181.69	123	683.88	269.25
84	467.04	183.87	124	689.44	271.44
85	472.60	186.06	125	694.51	273.63
86	478.16	188.25	126	700.56	275.82
87	483.72	190.44	127	706.12	278.01
88	489.28	192.63	128	711.68	280.20
89	494.84	194.82	129	717.24	282.39
90	500.40	197.02	130	722.24	284.58
91	505.96	199.20	131	728.36	286.76
92	511.52	201.39	132	733.92	288.96
93	517.08	203.58	133	739.48	291.15
94	522.64	205.77	134	745.04	293.33
95	528.2	207.96	135	750.03	295.52
96	533.76	210.14	136	756.16	297.70
97	539.32	212.34	137	761.72	299.90
98	544.88	214.53	138	767.28	302.09
99	550.44	216.72	139	772.84	304.28
100	556	218.91	140	777.84	306.47
101	561.56	221.10	141	783.96	308.66
102	567.12	223.28	142	789.52	310.85
103	572.68	225.47	143	795.08	313.04
104	578.24	227.66	144	800.64	315.23
105	583.8	229.85	145	806.20	317.41
106	589.36	232.04	146	811.76	319.60

LNT65-SPA

3.0W Sauna/Steam Rated Flexible LED Neon Series



CUTTING LENGTH INCREMENT TABLE

CODE	LENGTH IN CM	LENGTH IN INCHES
147	817.32	321.78
148	822.88	323.97
149	828.44	326.17
150	833.34	328.35
151	839.56	330.54
152	845.12	332.72
153	850.68	334.91
154	856.24	337.10
155	861.16	339.30
156	867.36	341.49
157	872.92	343.67
158	878.48	345.87
159	884.04	348.06
160	888.94	350.25
161	895.16	352.44
162	900.72	354.63
163	906.28	356.82
164	911.84	359.01
165	916.68	361.20
166	922.96	363.37
167	928.52	365.57
168	934.08	367.75
169	939.64	369.94
170	945.20	372.13
171	950.76	374.32
172	956.32	376.50
173	961.88	378.69
174	967.44	380.88
175	972.28	383.09
176	978.56	385.28
177	984.12	387.45
178	989.68	389.64
179	995.24	391.83
180	1000.8	394.02

LNT65-SPA

3.0W Sauna/Steam Rated Flexible LED Neon Series




COMPATIBLE DRIVERS

PSDM SERIES

DIMMABLE MAGNETIC LOW VOLTAGE (MLV)


PSDM-20W-24V	CLASS 2	5.6" x 2" x 2.14"
PSDM-40W-24V	CLASS 2	5.6" x 2" x 2.14"
PSDM-60W-24V	CLASS 2	6.5" x 2.3" x 2.5"
PSDM-100W-24V	CLASS 2	6.5" x 2.3" x 2.5"
PSDM-150W-24V		9.8" x 3" x 3"
PSDM-192W-24V	CLASS 2	7.0" x 7.0" x 3.2"
PSDM-200W-24V		9.8" x 3" x 3"
PSDM-288W-24V	CLASS 2	9.8" x 4.2" x 3.5"
PSDM-300W-24V		7.0" x 7.0" x 3.2"

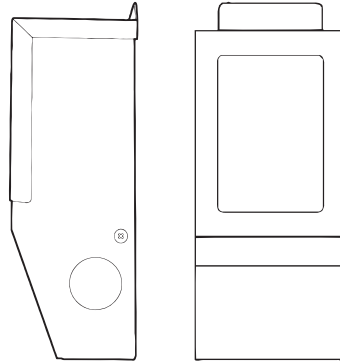

PSDH SERIES

HIGH PERFORMANCE MAGNETIC LOW VOLTAGE (MLV)

PSDH-48W-24V	CLASS 2	11.25" x 3.37" x 3.25"
PSDH-96W-24V	CLASS 2	11.25" x 3.37" x 3.25"
PSDH-288W-24V	CLASS 2	14.25" x 8.43" x 4.43"

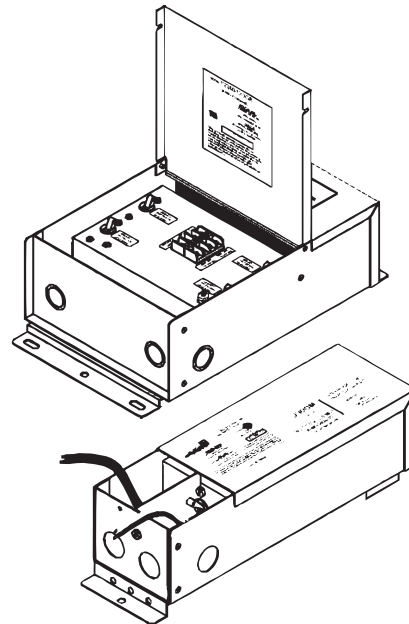

LNT65-SPA

3.0W Sauna/Steam Rated Flexible LED Neon Series




COMPATIBLE DRIVERS

PSDL SERIES

TRIAC DIMMABLE


PSDL-30W-24V	CLASS 2	6.5" x 3.63" x 1.03"
PSDL-60W-24V	CLASS 2	7.4" x 3.63" x 1.03"
PSDL-96W-24V	CLASS 2	8.67" x 3.67" x 1.62"
PSDL-150W-24V		8.67" x 3.67" x 1.62"
PSDL-192W-24V	CLASS 2	10.25" x 4.06" x 1.82"
PSDL-200W-24V		10.25" x 4.06" x 1.82"
PSDL-288W-24V	CLASS 2	10.25" x 4.06" x 1.82"
PSDL-300W-24V		10.25" x 4.06" x 1.82"

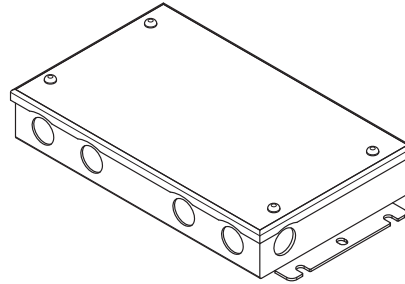

PSHK SERIES

NON-DIMMING W/ JUNCTION BOX


PSHK-30W-24V-UNV	CLASS 2	6.5" X 3.6" X 1.02"
PSHK-60W-24V-UNV	CLASS 2	7.4" X 3.62" X 1.02"
PSHK-96W-24V-UNV	CLASS 2	8.66" X 3.66" X 1.61"
PSHK-150W-24V-UNV		10.24" X 4.06" X 1.81"
PSHK-200W-24V-UNV		10.24" X 4.06" X 1.81"
PSHK-300W-24V-UNV		10.94" X 4.25" X 1.81"

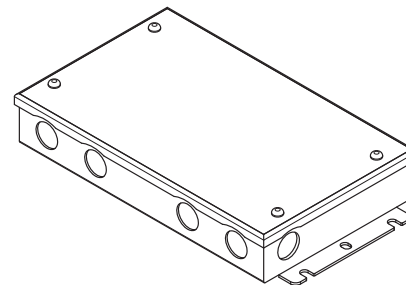

PSVT SERIES

0-10V DIMMING DRIVER

PSVT-60W-24V	CLASS 2	7.4" X 3.72" X 1.57"
PSVT-96W-24V	CLASS 2	8.66" X 3.72" X 1.57"
PSVT-200W-24V		10.24" X 4.13" X 1.77"
PSVT-288W-24V	CLASS 2	11.85" X 4.25" X 1.81"
PSVT-300W-24V		10.94" X 4.33" X 1.77"

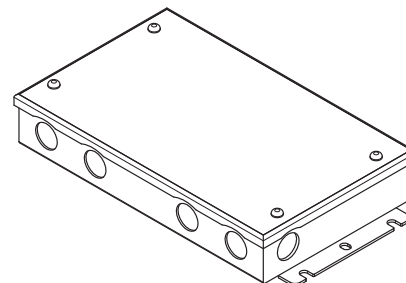

LNT65-SPA

3.0W Sauna/Steam Rated Flexible LED Neon Series




COMPATIBLE DRIVERS

PSRX SERIES

4-in-1 DIMMING DRIVER W/ JUNCTION BOX


PSRX-30W-24V-UNV	CLASS 2	6.5" X 3.7" X 1.57"
PSRX-60W-24V-UNV	CLASS 2	7.4" X 3.72" X 1.57"
PSRX-96W-24V-UNV	CLASS 2	10.24" X 4.13" X 1.77"
PSRX-150W-24V-UNV		10.24" X 4.13" X 1.77"
PSRX-200W-24V-UNV		10.24" X 4.13" X 1.77"
PSRX-300W-24V-UNV		10.94" X 4.33" X 1.77"

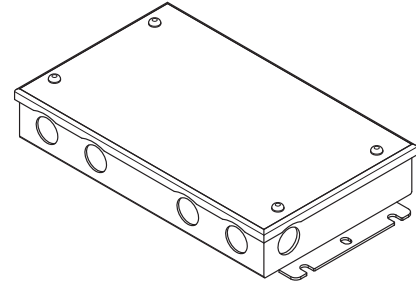

LUTRON 1%

2 OR 3-WIRE DIMMING

LTEA4U1UKL-CV240	CLASS 2	4.0" x 1.5" x 4.0"
L3DA4U1UKL-CV240	CLASS 2	4.0" x 1.5" x 4.0"

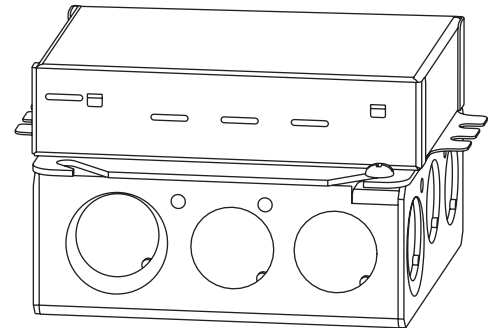

LUTRON 1%

PSDE-96W-24V-ECO	CLASS 2	10.5" x 3.0" x 2.0"
-------------------------	---------	---------------------

