

SPECIFICATION SHEET

JOB NAME: _____
 LOCATION: _____
 QUOTE/REF#: _____



The **DELTA DWLS Series** is a rotating wall-mount fixture with an ultra slim profile and built-in dimmable driver eliminating the need for an external/remote transformer. This LED light fixture has the ability to rotate up to 120° making it easy to fine tune and adjust the desired beam spread and angle. It is a unique LED fixture that is both sleek and modern with an intuitive design for ease of installation. It comes available in 3 color finishes and different color temperature options.

SPECIFICATIONS

TYPE	Wall Mount
AVAILABLE LENGTHS	24" / 36" / 48"
FINISH	Black / White / Brushed Aluminum
LUMEN OUTPUT	400 Lumens / Ft.
POWER CONSUMPTION	6W/Ft.
DIMMING	0-10V, TRIAC
INPUT VOLTAGE	120V-277V
COLOR TEMP	24K/27K/30K/35K/40K/50K
CRI	90 CRI
DRIVER	Integrated Class 2
FIXTURE ROTATION	120°
MATERIAL	Anodized Aluminum
PROTECTION	Overload & Short Circuit Protection
LUMEN MAINTENANCE	50,000 Hrs

FEATURES

- TRIAC & 0-10V dimming options
- 400 Lumens
- 6W per Ft.
- Rotates up to 120°
- Black, White and Brushed Aluminum finish options
- Ultra slim
- Exceptional light distribution
- Extremely efficient LED lighting
- Easy to setup and install
- Suitable for dry and damp locations

	COLOR TEMP	CRI	LUMENS/Ft.
	2400K	90	400
	2700K	90	400
	3000K	90	400
	3500K	90	400
	4000K	90	400
	5000K	90	400



DELTA DWLS SERIES Rotating LED Fixture




SPECIFICATION CODE

Model	Fixture Length	Color Temp	Finish	Dimming
DWLS	24 24 inches	24K 2400K	BA Brushed Aluminum	ELV ELV Dimming, 120V
	36 36 inches	27K 2700K		DIM10 0-10 Dimming, 120V-277V
	48 48 inches	30K 3000K	BK Black	REM Remote Driver
		35K 3500K		
		40K 4000K	WH White	
		50K 5000K		


ACCESSORIES

OPTIONAL WALL PLATE

- DWLS-MP-BA** Brushed Aluminum
- DWLS-MP-WH** White
- DWLS-MP-BK** BK



DIMENSIONS

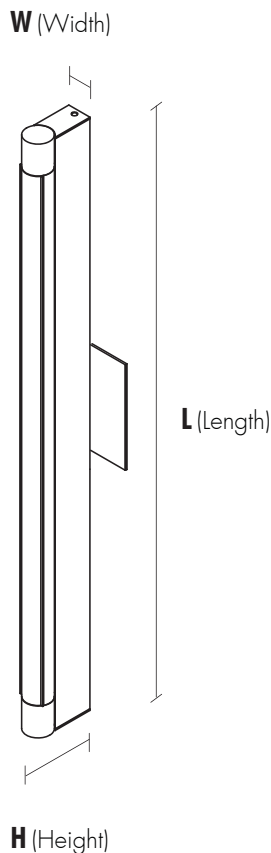

	Part No.	L X W X H
24in	DWLS100-24	634.2 x 28.6 x 65.3 mm [24.97" x 1.12" x 2.57"]
36in	DWLS100-36	933.7 x 28.6 x 65.3 mm [36.76" x 1.12" x 2.57"]
48in	DWLS100-48	1236.3 x 28.6 x 65.3 mm [48.67" x 1.12" x 2.57"]

PHOTOMETRICS

2FT | 12W | 90CRI | 3000K

Delivered Ourput : 751 lm | CBCP : 239 cd | Beam Angle : 0°

Center Beam Intensity	Beam Width	Height
239 lx	290cm	1m
60 lx	582cm	2m
26 lx	873cm	3m
15 lx	1164cm	4m
10 lx	1454cm	5m

