


ALP-120

CLOSET ROD LINEAR LED LUMINAIRE

Introducing a multi-functional LED lighting fixture designed to enhance your closet space. It functions as a sturdy clothing rod to hang your wardrobe and an attractive light source for your closet. It is also sized based on industry standards making it easy to retrofit into existing installations.

Project _____
Location _____
Quote/ Ref # _____

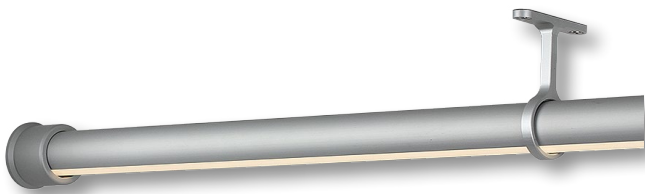

SPECIFICATIONS

INPUT VOLTAGE	24V DC Constant Voltage
POWER CONSUMPTION	3W 4W 5W
LUMEN OUTPUT	250 Lm/ Ft. (3W) 440 Lm/ Ft. (4W) 595 Lm/ Ft. (5W)
NO. OF LEDS	36 LEDs per Ft.
BEAM ANGLE	120° Spread
CRI	90+
COLOR TEMPERATURE	27K/ 30K/ 35K/ 40K/ 50K
DIMMING	MLV, ELV, 0-10 and TRIAC
MAX RUN LENGTH	8 Ft.
MAX WEIGHT	400 lbs.
OPERATING TEMPERATURE	-40°F (-40°C) ~ 140°F (60°C)
IP RATING	Indoor (Dry Location)
CERTIFICATIONS	UL Listed, Certified UL2108, TITLE 24 JA8 Compliant
LUMEN MAINTENANCE	50,000 Hrs.
WARRANTY	5-Year Limited

FEATURES

- Superior Color Rendering Index (CRI)
- Less than 1.7" Diameter
- Dimmable
- UL Listed (US and Canada), Certified UL2108
- Approved for closet/ storage space installation per NEC 410.16(A)(3) and 410.16 (C)(5)




MODEL	SIZE	WATT	COLOR TEMP	VOLT	FINISH	DRIVER
ALP-120	4 4Ft.	L1 3W/ FT	27K 2700K	24 24V DC	SI Silver	EB PSDL Series TRIAC ELV Dimming
	8 8Ft.	L2 4W/ FT	30K 3000K		BZ Bronze	D10 PSDE-96W-24-010JB 0-10V Dimming
	1 CUSXX Custom Length	L3 5W/ FT	35K 3500K		*BK Black	HL3E Lutron ECO 3-Wire
			40K 4000K		*WH White	ND Non Dimming
			50K 5000K			
	*1 = Custom length per in.				* Powder Coating (Allow 2 Weeks Lead Time)	


ALP-120

CLOSET ROD LINEAR LED LUMINAIRE

DIMENSIONS

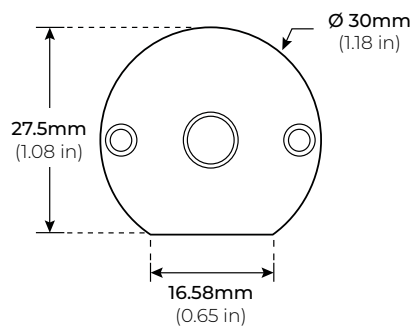

ASSEMBLY

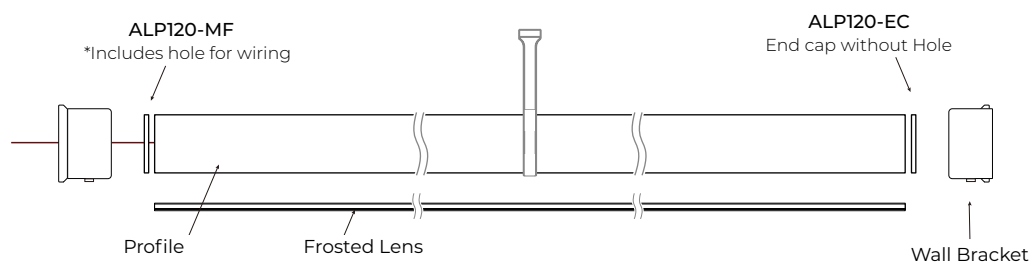

ALP-120

CLOSET ROD LINEAR LED LUMINAIRE


ACCESSORIES

ALP120-MF

WALL MOUNT BRACKET

* 2 PCS. PER KIT

* SOLD SEPARATELY

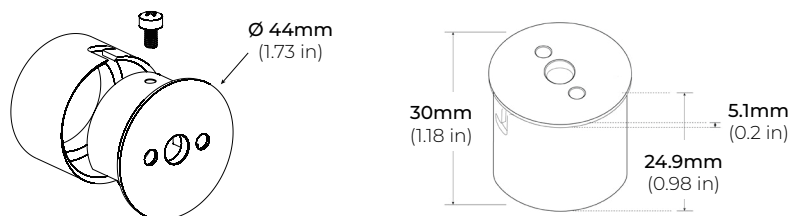


ALP120-EC

END CAP

* 2 PCS. PER KIT

* INCLUDED IN ALP120-MF




ALP120-HS

WALL MOUNT SUPPORT

* 1 PC. RECOMMENDED EVERY 4FT.

* SOLD SEPARATELY




ALP120-CMB

CEILING MOUNTING BRACKET

* 2 PCS. PER KIT

* ONLY AVAILABLE IN SILVER AND BRONZE

* SOLD SEPARATELY

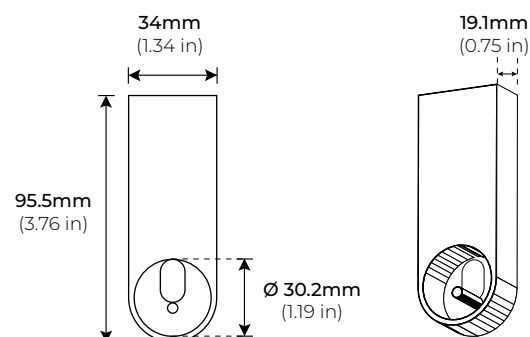


ALP120-CPS

CEILING MOUNT SUPPORT

* 1 PC. RECOMMENDED EVERY 4FT.

* ONLY AVAILABLE IN SILVER AND BRONZE

* SOLD SEPARATELY

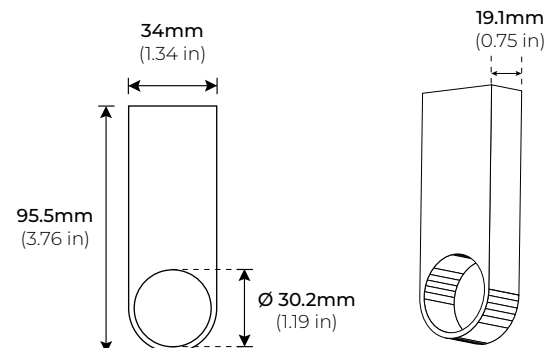


ALP-120

CLOSET ROD LINEAR LED LUMINAIRE

COMPATIBLE TRANSFORMERS


PSDL SERIES TRIAC DIMMABLE

PSDL-30W-24V	CLASS 2	6.5" X 3.63" X 1.58"
PSDL-60W-24V	CLASS 2	7.4" X 3.63" X 1.58"
PSDL-96W-24V	CLASS 2	8.67" X 3.67 X 1.62"
PSDL-150W-24V		10.25" X 4.06" X 1.82"
PSDL-192W-24V	CLASS 2	11" X 4" X 1.82"
PSDL-200W-24V		10.25" X 4.06" X 1.82"
PSDL-288W-24V	CLASS 2	11.85" X 4.25" X 1.82"
PSDL-300W-24V		10.25" X 4.06" X 1.82"

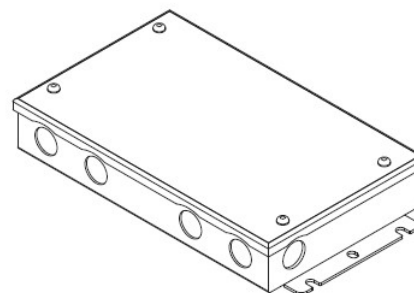


PSDE SERIES 0-10V DIMMING W/ JUNCTION BOX

PSDE-96W-24V-010-JB	CLASS 2	12.1" X 2.36" X 1.4"
---------------------	---------	----------------------

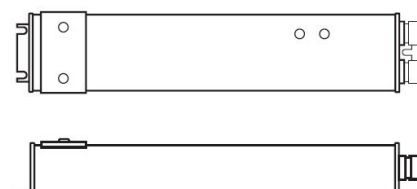

LUTRON 1% 3-WIRE DIMMING

L3DA4U1UKL-CV240	CLASS 2	4.89" X 4" X 2.62"
------------------	---------	--------------------

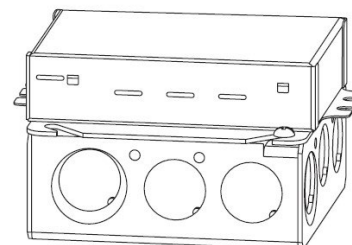

PSDE-96W-24V-ECO	CLASS 2	10.5" X 3.0" X 2.0"
------------------	---------	---------------------



ALP-120

CLOSET ROD LINEAR LED LUMINAIRE

NON-DIMMING DRIVERS (COMPATABLE WITH ALL SYSTEMS)

PSHK SERIES
NON-DIMMING CONSTANT VOLTAGE WITH JUNCTION BOX

PSHK-30W-24V	CLASS 2	6.5" X 3.6" X 1.02"
PSHK-60W-24V	CLASS 2	7.4" X 3.62" X 1.02"
PSHK-96W-24V	CLASS 2	8.66" X 3.66" X 1.61"
PSHK-150W-24V		10.24" X 4.06" X 1.81"
PSHK-200W-24V		10.24" X 4.06" X 1.81"
PSHK-288W-24V	CLASS 2	11.85" X 4.25" X 1.82"
PSHK-300W-24V		10.94" X 4.25" X 1.81"

