

LSG-20

2W 120V AC PLUGIN LED TAPE LIGHT

Project _____
Location _____
Quote/ Ref # _____

The **LSG-20** is a dimmable 120V AC outdoor tape light offering the highest quality in direct-connect LED lighting. It can be ordered in custom lengths, in 6 inch increments and comes sealed with an IP67 rating for outdoor or wet installations and applications. This ETL Listed, 120V linear light can reach a maximum length of 150Ft. in a single continuous run.



SPECIFICATIONS

POWER CONSUMPTION	2W per Ft.
LUMEN OUTPUT	196 Lumens per Ft.
CRI	90+
COLOR TEMPERATURE	24K/ 27K/ 30K/ 35K/ 40K/ 50K
DIMMING	ELV and TRIAC
MAXIMUM RUN LENGTH	150 Ft.
CUTTING POINT	Every 6.0 in (152.4mm)
BINNING	MacAdam Ellipse 2-Step
OPERATING VOLTAGE	120V AC
OPERATING TEMPERATURE	-22°F (-30°C) to +122°F (+50°C)
BEAM ANGLE	120°
IP RATING	IP54/ IP67
CERTIFICATIONS	ETL Listed
LUMEN MAINTENANCE	50,000 Hrs.

FEATURES

- Line Voltage Linear Light
- 120V AC, No power supply required
- Continuous Run up to 150 Ft.
- Wet and Dry Locations
- 90+ CRI
- Suitable for Indoor/ Outdoor use
- Custom length available every 6 in.
- Dimmable
- ETL Listed (US and Canada)




MODEL	COLOR TEMP	LED LENGTH	VOLTAGE	POWER FEED	IP RATING
LSG-20	24K 2400K	50 50 Ft.	120 120 Volts	HWC36 36" Hardwire Power Feed Cable	IP54 Indoor/ Damp
	27K 2700K	150 150 Ft.		HWC72 72" Hardwire Power Feed Cable	IP67 Outdoor*
	30K 3000K	1XX per Ft.		HWC120 120" Hardwire Power Feed Cable	
	35K 3500K			HWC240 240" Hardwire Power Feed Cable	
	40K 4000K			HWC-CUS Custom Length Wire	
	50K 5000K				
		*1 = Custom length per FT. (cuttable every 6")			* = Ideal for applications with direct exposure to rain/ water (MADE TO ORDER - Please allow 3 weeks lead time)

LSG-20

2W 120V AC PLUG IN LED TAPE LIGHT

DIMENSIONS

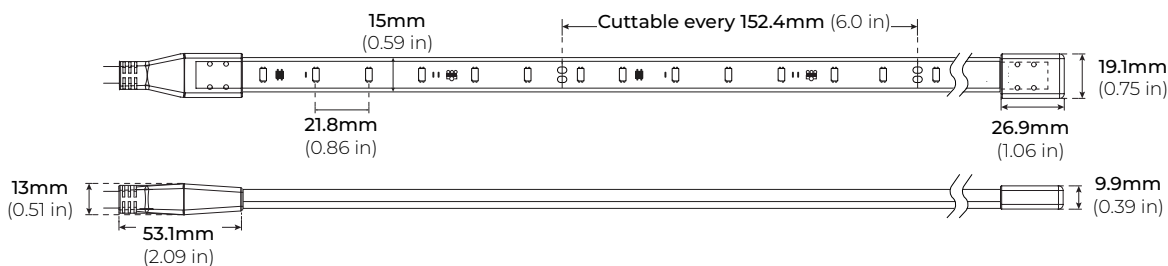


COMPATIBLE ACCESSORIES

MOUNTING CHANNEL

LSG-AC48

LSG-AC84

48" AND 84" ALUMINUM CHANNEL



MOUNTING CHANNEL & MOUNTING CLIP


LSG-CN48

48" ALUMINUM CHANNEL


LSG-CN-CL

MOUNTING CLIP

* INCLUDED WITH LSG-CN48




LSG-CN48



LSG-CN-CL

LSG-PC48

48" PLASTIC CHANNEL



MOUNTING CHANNEL & FROSTED LENS

LSG-AC2000FR-48

LSG-AC2000FR-84

48" AND 84" ALUMINUM CHANNEL

LSG-AC2000FR-EC

END CAP


* SOLD SEPARATELY

LSG-AC2000FR-MC


MOUNTING CLIP

* 2PCS INCLUDED WITH EVERY 48"

* 4PCS INCLUDED WITH EVERY 84"

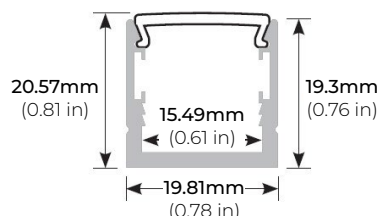

LSG-AC2000FR



LSG-AC2000FR-EC


LSG-20

2W 120V AC PLUG IN LED TAPE LIGHT

COMPATIBLE ACCESSORIES


LSG-AC2000-BKT-ADJ ADJUSTABLE BRACKET

*SOLD SEPARATELY



LSG-AC2000-ASB ADJUSTABLE BRACKET

*SOLD SEPARATELY

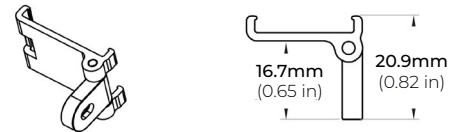

MOUNTING CHANNEL & FROSTED LENS

LSG-AC3100FR-48-SI 48" CHANNEL (SILVER)

LSG-AC3100FR-84-SI 84" CHANNEL (SILVER)

LSG-AC3100FR-96-SI 96" PROFILE (SILVER)

LSG-AC3100-EC-SI END CAP (SILVER)

* SOLD SEPARATELY


LSG-AC3100-ECH-SI END CAP WITH HOLE (SILVER)

* SOLD SEPARATELY

LSG-AC3100FR-MC MOUNTING CLIP


* 2PCS INCLUDED WITH EVERY 48"

* 4PCS INCLUDED WITH EVERY 84" AND 96"

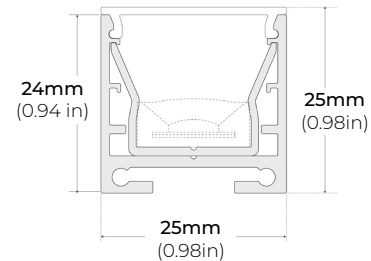

MOUNTING CLIP

LSG-MC MOUNTING CLIP



LSG-20

2W 120V AC PLUG IN LED TAPE LIGHT

COMPATIBLE ACCESSORIES


HARDWIRE POWER FEED CABLE

LSG-HWC36	36" HARDWIRE POWER FEED CABLE
LSG-HWC72	72" HARDWIRE POWER FEED CABLE
LSG-HWC120	120" HARDWIRE POWER FEED CABLE
LSG-HWC240	240" HARDWIRE POWER FEED CABLE



BOTTOM FEED POWER CABLE

LSG-HWC72-BF	72" HARDWIRE BOTTOM FEED POWER CABLE
--------------	--------------------------------------

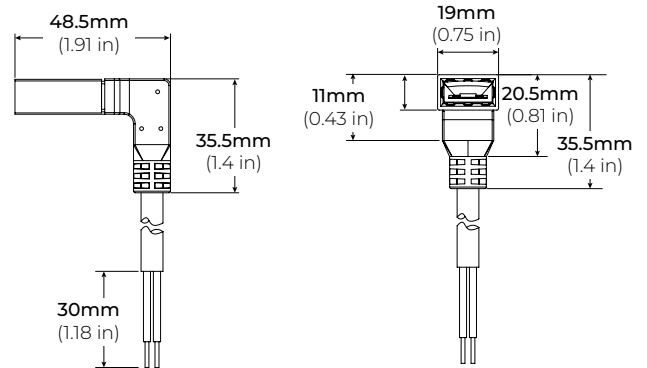

POWER CABLE

LSG-PCA72	72" POWER FEED CABLE
-----------	----------------------



LINK EXTENSION CABLE

LSG-LNK6	6" LINK CABLE
LSG-LNK12	12" LINK CABLE
LSG-LNK24	24" LINK CABLE

