LWW120-CV

120V-277V HIGH-OUTPUT LED WALL WASHER

UPDATED: 11.04.26

Project _____

Location _____

Quote/ Ref # _____

LWW120-CV Linear Wall washer series is a powerful 120V LED flood light typically used for building facades, signs or any wall washing application Available in multiple optical lens options to provide endless lighting solutions. Available in narrow, medium, wide and elliptical optic options.



SPECIFICATIONS

INPUT VOLTAGE	120-277 AC
OPERATING FREQUENCY	50/ 60 Hz
POWER CONSUMPTION	6W | 11W | 21W
LUMEN OUTPUT	Up to 840 Lm.
COLOR TEMPERATURE	27K / 30K / 40K / 60K
BEAM ANGLE	15° / 30° / 45° / 20° x 40°
MAX RUN	Linkable up to 60 ft.
CRI	90+
DIMMING	0-10V
OPERATING TEMPERATURE	-4°F (-20°C) ~ 104°F (40°C)
HOUSING	Extruded Aluminum
FINISH	Silver, Black
IP RATING	IP66 Outdoor/ Wet Location
CERTIFICATIONS	ETL Listed
LUMEN MAINTENANCE	50,000 Hrs.
WARRANTY	5-Year Limited

FEATURES

- 90+ CRI
- Multiple beam angles
- Multiple CCT options available
- ETL Listed

LUMENS

LENGTH	WATT	LUMENS
LWW120-CV-12	6W	240
LWW120-CV-24	11W	440
LWWW120-CV-48	21W	840

OUTDOOR 90+ CRI DIMMABLE 50,000 HRS IP66 5 YEAR WARRANTY

MODEL	LENGTH	COLOR TEMP	OPTICS	DIMMING	OPTIONS	VOLTAGE	FINISH
LWW120-CV	**12** 12.32 in (6W)	**27K** 2700K	**15** 15°	**D10** 0-10V	**GS** Glare Shield	**UNV** 120V-277V	**SI** Silver
	24 24.21 in (11W)	**30K** 3000K	**30** 30°				**BK*** Black
	48 48.03 in (21W)	**40K** 4000K	**45** 45°				
		60K 6000K	**2040** 20° x 40°				


* Additional lead time required

LWW120-CV

120V-277V HIGH-OUTPUT LED WALL WASHER

UPDATED: 11.04.26

DIMENSIONS

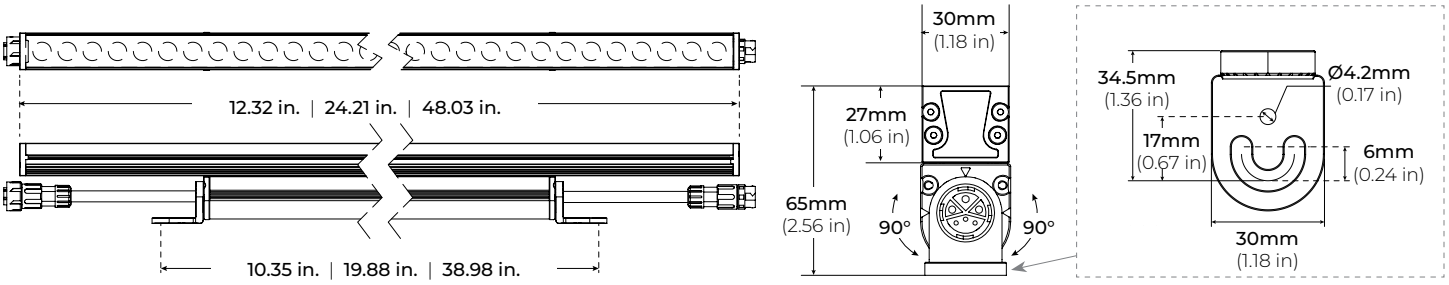

OPTICS




15° | 30° | 45° | 20° x 40°


COMPATIBLE ACCESSORIES

LWW120-EC
END CAP
*Sold Separately

*One end cap required per run length

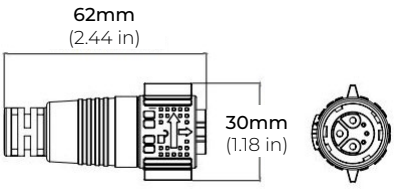

LWW120-CV-GS
GLARE SHIELD

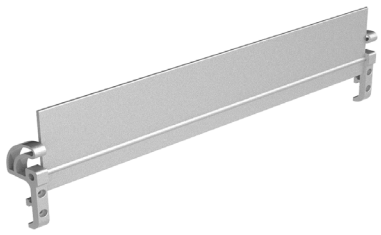

LWW120-CV

UPDATED: 11.04.26

120V-277V HIGH-OUTPUT LED WALL WASHER

COMPATIBLE ACCESSORIES

LWW120-LNK-10
LWW120-LNK-36
LWW120-LNK-72
10”, 36”, 72” LINK EXTENSION CABLE
*Sold Separately



LWW120-HWC-72
LWW120-HWC-120
72” AND 120” HARDWIRE CABLE
*Sold Separately

