ULM-220

3W 12V MINI RECESSED LED DOWNLIGHT

UPDATED: 11.18.26

Project _____

Location _____

Quote/ Ref # _____

ULM-220 is a 3 Watt, 12VDC low profile, recessed downlight that delivers 225 lumens in either 3000K or 4000K. This mini-cabinet light is a great fit for many applications requiring focused accent lighting in a small form factor. Perfect for display cases, kitchen cabinets and furniture installations.



SPECIFICATIONS

INPUT VOLTAGE	12V DC
POWER CONSUMPTION	3.0W
LUMEN OUTPUT	225 Lumens
BEAM ANGLE	40°
SWIVEL	20° Adjustable
COLOR TEMPERATURE	30K/ 40K
CRI	85+
DIMMING	10-100% with most CFL/LED and ELV's
MOUNTING	Recessed
CUTOUT	1 ¾"
CONNECTION	20" length cord with quick connector
FINISH	White / Black / Silver
LUMEN MAINTENANCE	50,000 hrs.

FEATURES

- 3W High Output LED
- 225 Lumens
- 12V DC
- CREE LED Technology
- 20° adjustable swivel to direct light
- 20" length cord with quick connector
- Dimmable with most CL and ELV dimmers
- Suitable for recessed applications

INDOOR 85+ CRI DIMMABLE


MODEL	COLOR TEMP	FINISH	VOLTAGE
ULM220	**30K** 3000K **40K** 4000K	**WH** White **BK** Black **SI** Silver	**12** 12V

ULM-220

3W 12V MINI RECESSED LED DOWNLIGHT

UPDATED: 11.18.26


DIMENSIONS

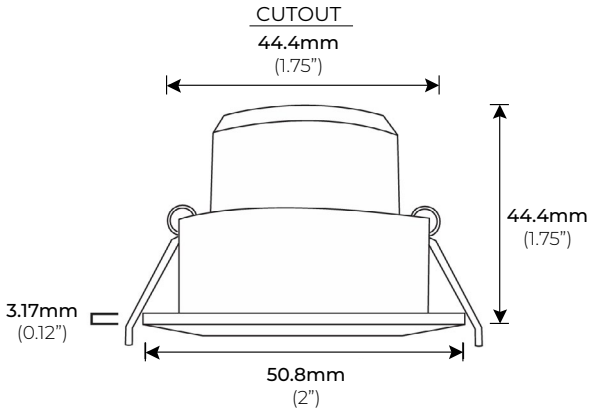

COMPATIBLE TRANSFORMER

PSDL SERIES
TRIAC DIMMABLE

PSDL-30W-12V	CLASS 2	6.5" X 3.63" X 1.58"
PSDL-60W-12V	CLASS 2	7.4" X 3.63" X 1.58"
PSDL-100W-12V	CLASS 2	8.67" X 3.67 X 1.62"
PSDL-150W-12V		10.25" X 4.06" X 1.82"
PSDL-200W-12V		10.25" X 4.06" X 1.82"
PSDL-300W-12V		10.25" X 4.06" X 1.82"

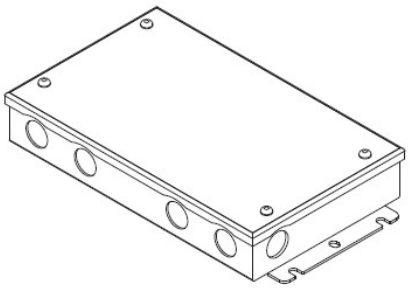

PSRX SERIES
4-IN-1 DIMMING DRIVER W/ JUNCTION BOX

PSRX-30W-12V-UNV	CLASS 2	6.5" X 3.72" X 1.57"
PSRX-60W-12V-UNV	CLASS 2	7.4" X 3.72" X 1.57"
PSRX-150W-12V-UNV		10.24" X 4.13" X 1.77"

